

PFPTBV Series

PVC Threaded Ball Valves



Product Features

- Pressure rating: 150 PSI at 73.4° F (23° C)
- Low flow loss
- NPT end connection conforms to ANSI B1.20.1
- Not for use with compressed air or gases



Product Specifications

NO.	PART	MATERIAL	QTY
1	Body	PVC	1
2	Seat Seal	EPDM,PTFE	2
3	Ball	PVC	1
4	O-Ring	EPDM,FPM	1
5	Handle	ABS	1
6	Bolt	ZINC-PLATED STEEL	1
7	Cap	ABS	1



PFPTBVD

SIZE	PFPTBVD		PFPTBVF		PFPTBVG		PFPTBVH		PFPTBVJ		PFPTBVK	
	In	mm	In	mm	In	mm	In	mm	In	mm	In	mm
	1/2"	12.7	3/4"	19.01	1"	25.4	1-1/4"	31.7	1-1/2"	38.1	2"	50.8
thd./in	NPT	14	14	14	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
	BSPT	14	14	14	11	11	11	11	11	11	11	11
D	1.50	38	1.93	49	2.24	57	2.48	63	2.95	75	3.62	92
D1	1.18	30	1.50	38	1.77	45	2.13	54	2.44	62	3.03	77
d	0.55	14	0.79	20	0.98	25	1.18	30	1.42	36	1.83	46.5
L	3.27	83	3.74	95	4.17	106	4.49	114	5.12	130	5.79	147
L1	2.76	70	3.46	88	3.94	100	3.94	100	4.29	109	5.28	134
H	2.52	64	3.11	79	3.74	95	3.90	99	4.53	115	5.31	135
H1	1.77	45	2.13	54	2.56	65	2.64	67	2.99	76	3.50	89

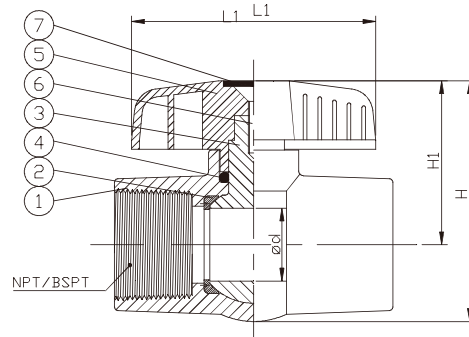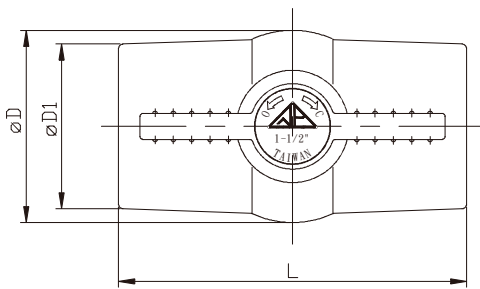

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.