



Bronze Check Valves

Features

- High capacity, size 1/2" -2" 400 WOG
- Soft seat for bubble tight shutoff, spring loaded for fast seating action
- Low cracking pressure 1/2 PSI
- Flow profile designed to minimize head loss easy design
- Perfect sealing both at high and low pressure wide temperature range: +10° to 210° F
- High technology materials to ensure best resistance in any condition
- Patented disc guide
- Connection: female - female
- Bronze body
- Stainless steel springs with neoprene o-ring seal
- Suitable for water, oils and general purpose applications
- Can be installed in ALL positions including the vertical down direction
- Not for use at or below ground level




PFSCVD


Model Numbers

PFSCVD	1/2"
PFSCVF	3/4"
PFSCVG	1"
PFSCVH	1-1/4"
PFSCVJ	1-1/2"
PFSCVK	2"

Product Specifications

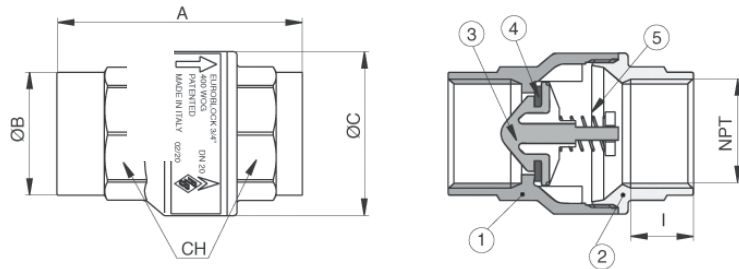

SIZE	A	OB	OC	I	CH	CV	PSI	Lb s
1/2"	2.32	0.98	1.35	0.53	0.98	6.00	400	0.32
3/4"	2.56	1.20	1.65	0.55	1.22	11.00	400	0.49
1"	2.76	1.48	1.93	0.66	1.50	16.90	400	0.68
1 1/4"	2.93	1.87	2.40	0.68	1.89	27.40	400	1.13
1 1/2"	3.17	2.10	2.87	0.68	2.12	39.10	400	1.61
2"	3.37	2.68	3.46	0.69	2.64	60.70	400	2.28

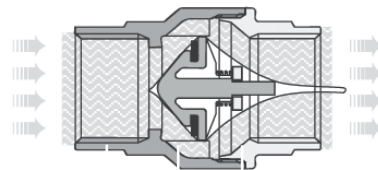

CONNECTION: ANSI B 1.20.1

WARNING: This product contains lead or lead compounds known to the State of California to cause cancer and birth defects and other reproductive harm. Do not use in connection with drinking water. Wash hands after handling.

NPO	S	PART NAME	MATERIAL	N	PCS
1		Body	Brass CW 617N UNI EN 12165	1	
2		End Connection	Brass CW 617N UNI EN 12165	1	
3		Obstructor	Polyetherimide	1	
4		Seat	100002 NBR	1	
5		Spring	Stainless Steel	1	

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

NSF 61

