



Threaded Gate Valves

Product Features


- Economy Brass Gate Valve
- Threaded ends
- Solid wedge disc
- Non-rising Stem
- Pressure Rating: 200 WOG
- Not steam rated
- Temperature rating: 180°F
- Not for use at or below ground level
- Not for potable use



Product Specifications

PFT300D

NO	PART	MATERIAL	SPEC. JIS	SPEC. ASTM
1	Wheel Nut	Steel	S10C	AISI-1010
2	Name Plate	Aluminum	A1100P	B209-1100
3	Hand Wheel	Cast Iron	FC20	A48 CLASS/NO.35
4	Stem	No-lead Brass	C3604B	B16-C36000
5	Packing Nut	Brass Cast Brass	C3604B YBSC3	B16-C36000 (1/2"-1 1/4") B584-C85700 (1 1/2"-4")
6	Gland	Brass	C3604B	B16-C36000
7	Gland Packing	Graphite	Commercial	Commercial
8	Bonnet	No-lead Brass	YBSC3	B584-C85700
9	Locking Nut	No-lead Brass	C3604B	B16-C36000
10	Disc	No-lead Brass	YBSC3	B584-C85700
11	Body	No-lead Brass	YBSC3	B584-C85700

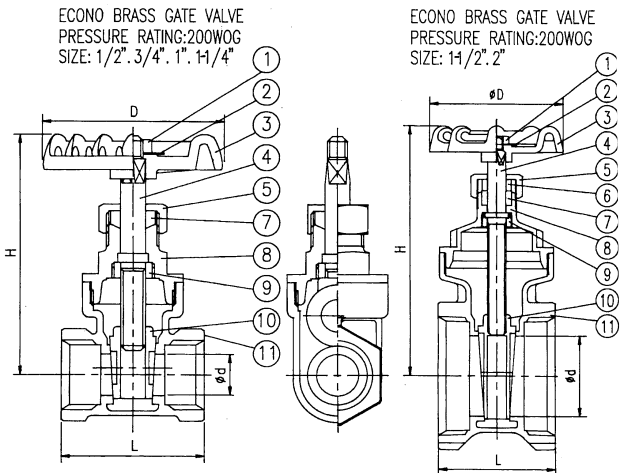

MODEL	SIZE		L		H		D		d	
	in	mm	in	mm	in	mm	in	mm	in	mm
PFT300D	1/2	12.7	1.54	39.0	2.72	69.0	2.13	54.0	0.47	12.0
PFT300F	3/4	19.1	1.71	43.5	2.84	72.0	2.13	54.0	0.57	14.5
PFT300G	1	25.4	1.85	47.0	3.31	84.0	2.13	54.0	0.75	19.0
PFT300H	1-1/4	31.8	2.09	53.0	3.86	98.0	2.40	61.0	0.94	24.0
PFT300J	1-1/2	38.1	2.24	57.0	4.57	116.0	3.03	77.0	1.25	31.7
PFT300K	2	50.8	2.40	61.0	4.92	125.0	3.03	77.0	1.48	37.5
PFT300L	2-1/2	63.5	2.80	71.0	6.02	153.0	3.27	83.0	1.94	49.3
PFT300M	3	76.2	3.43	87.0	7.32	186.0	4.13	105.0	2.48	63.0
PFT300P	4	101.6	3.96	100.5	8.74/8.66	222/220	5.12/4.41	130/112	2.95	75.0

WARNING: This product contains lead or lead compounds known to the State of California to cause cancer and birth defects and other reproductive harm. **Do not use in connection with drinking water. Wash hands after handling.**

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

Distributed Exclusively by Ferguson and Wolseley Canada



"Not for potable use"