

PFXT



Thermal Expansion Tanks

Product Features

- Diaphragm-type
- Pre-pressurized expansion tank
- Designed for potable hot water systems
- Eliminates relief valve spills
- Controls pressure build-up
- Protects plumbing fixtures
- Extends water heater life
- Eliminates hot water waste
- Factory precharged to 40 PSI
- Low lead compliant
- 3/4" SS NPTM connection




Product Specifications

Model No.	Total Volume Gals.	Max Accept. Factor	Diameter A	Height B	System Connection	Ship Weight Lbs.
PFXT51	2.1	.45	8"	11.6"	3/4" NPTM	5
PFXT121	4.8	.73	11"	14.5"	3/4" NPTM	10

PFXT51

Water Heater Size/Volume	130°F	140°F	160°F	180°F
30 gallons	PFXT51	PFXT51	PFXT51	PFXT51
40 gallons	PFXT51	PFXT51	PFXT51	PFXT51
50 gallons	PFXT51	PFXT51	PFXT51	PFXT121
60 gallons	PFXT51	PFXT51	PFXT51	PFXT121
80 gallons	PFXT51	PFXT121	PFXT121	PFXT121
100 gallons	PFXT121	PFXT121	PFXT121	*
120 gallons	PFXT121	PFXT121	PFXT121	*
150 gallons	PFXT121	PFXT121	*	*
175 gallons	PFXT121	*	*	*

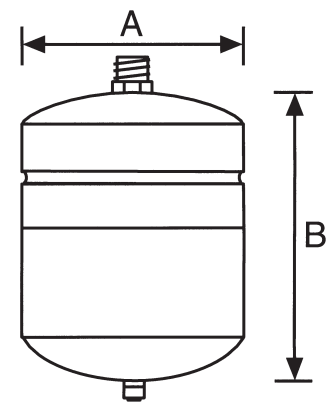

Maximum Operating Conditions

Operating Temperature - 200°F

Working Pressure - 150 psig (10.5 kg/cm²)

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO tanks carry a 1-year limited warranty. NSF 61 approved.

