




Incandescent
Halogen

Illuma-Flex® Mini Pendant **Track**
Pyramid Clear Colored Glass Low Voltage

	Type							
	-09A	-174A	-09B	-174B	-09R	-174R	-09W	-174W
P6139	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish			Lamping	Dimensions (Inches)		
	Brushed Nickel	Urban Bronze	Glass		A	B	C
P6139	-09A	-174A	Amber	12v T4 50w (Incl)	4-7/8	4-1/4	72
P6139	-09B	-174B	Blue	12v T4 50w (Incl)	4-7/8	4-1/4	72
P6139	-09R	-174R	Red	12v T4 50w (Incl)	4-7/8	4-1/4	72
P6139	-09W	-174W	White	12v T4 50w (Incl)	4-7/8	4-1/4	72

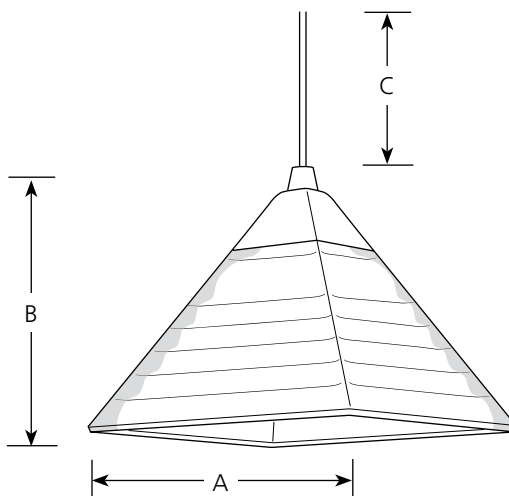

P6139

Specifications:

General

- Flex track mini-pendant
- Pyramid shaped clear colored glass
- Plated brushed nickel (-09) or urban bronze (-174) finishes
- One 50w T4 lamp included
- Mounts anywhere along Illuma-Flex track sections, or on monopoints
- Includes adapter that allows unit to be mounted to P8516 transformer for Alpha track system also.

Electrical

- Attachment to 12 volt Illuma-Flex track with supplied track fitter, 120V Alpha-Track using supplied P8777 adaptor and P8516 Alpha-Track transformer or monopoint canopy (requires P8780 or P8794 accessory)
- Lamp has a GY6.35 bi-pin base

Labeling

- CSA-CSA/US listed

Mini Pendant Support

- located just below the fitter to allow adjustment of cord length
- Cord is Teflon coated copper wire with a silicon sleeve that matches the finish

Progress Lighting
701 Millennium Blvd
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 8/10