

PCILS SERIES

Lensed LED Striplight

Specifications:

Features:

- Long life 50,000 hour LEDs at L80 for reduced maintenance
- Heavy gauge steel housing, die embossed for cooler operation and longer life
- Clear prismatic diffuser with flat bottom and vertical sides
- Hinges from either side
- LED light engine accessible for future maintenance or upgrades; modular replaceability
- 0-10V dimming driver
- Universal input voltage 120-277 VAC, 50/60Hz
- 5000 Lumens


Compliances:

PCILS Series are built to UL 1598 and 2108 standards, and bear appropriate CSA labels. Damp location labeling is standard.

Warranty:

5 year warranty (Terms and Conditions Apply)

Dimensions & Mounting:

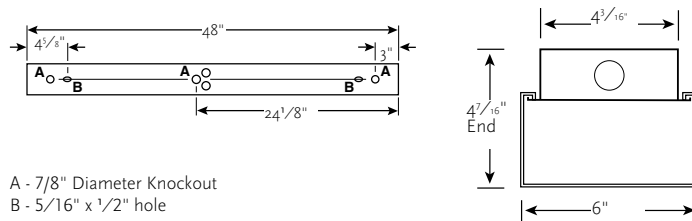

Images:



Catalog number:

Base	Lamp Type	Lamp Size	Color Temperature
PCILS	LED	4 - 4'	35K - 3500K

PCILS SERIES

Lensed LED Striplight

Photometric Data:

PCILS-LED-4-35K	
Fixture Lumens	5043
Watts	52.50
Mounting	SURFACE
Shielding Angle	0° = 90 90° = 90
Spacing Criterion	0° = 1.28 90° = 1.18
Luminous Option (LxWxH)	4.00' x 0.50' x 0.17'

Zonal Lumen Summary PCILS-LED-4-35K

Zone	Lumens	% Lamp	%Fixt
0-30	1500	29.8	29.8
0-40	2387	47.3	47.3
0-60	3712	73.6	73.6
0-90	4590	91.0	91.0
90-120	296	5.9	5.9
90-130	354	7.0	7.0
90-150	432	8.6	8.6
90-180	453	9.0	9.0
0-180	5043	100.0	100.0

Energy Data PCILS-LED-4-35K

Total Luminance Efficiency	100.0%
Total Luminance per Watt	96
ANSI/IESNA RP-1-2004 Compliance	Noncompliant

INDOOR CANDELA PLOT

