

PCILW SERIES

Low Profile LED Wraparound

Specifications:

Features:

- Long life 50,000 hour LEDs at L80 for reduced maintenance
- Model 2ft.: 2550 - 2600 Lumens
- Model 4ft.: 4650 - 4800 Lumens
- Heavy gauge steel housing, die embossed for maximum rigidity
- White steel end plates
- Diffuser features flat bottom and vertical sides
- Interior overlay for smooth appearance without pixelation
- Hinges from either side
- LED boards and driver accessible for future maintenance or upgrades
- Modular replaceability of LED components
- 0-10V dimming driver

Images:




Compliances:

PCILW Series are built to UL 1598 and 2108 standards, and bear appropriate CSA labels. Damp location labeling is standard.

Warranty:

5 year warranty (Terms and Conditions Apply)

Dimensions & Mounting:

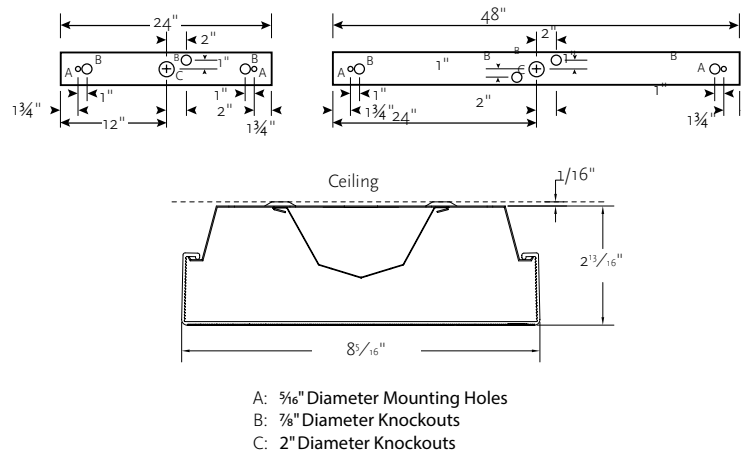

Catalog number:

Base	Lamp Type	Lamp Size	Color Temperature
PCILW	LED	2 - 2'	30K - 3000K
		4 - 4'	35K - 3500K

PCILW SERIES

Low Profile LED Wraparound


Photometric Data:

	PCILW-LED-2-35K	PCILW-LED-4-35K
Fixture Lumens	2647	4790
Watts	25.20	47.60
Mounting	SURFACE	
Shielding Angle	0° = 90 90° = 90	
Spacing Criterion	0° = 1.22 90° = 1.13	0° = 1.23 90° = 1.09
Luminous Option (LxWxH)	2.00' x 0.67' x 0.13'	4.00' x 0.67' x 0.12'

Zone	Lumens	% Lamp	%Fixt
0-30	930	35.1	35.1
0-40	1456	55.0	55.0
0-60	2168	81.9	81.9
0-90	2521	95.2	95.2
0-180	2647	100.0	100.0

Total Luminance Efficiency	100.0%
Total Luminance per Watt	105
ANSI/IESNA RP-1-2004 Compliance	Noncompliant

Test 9114 Test Date 6/6/4
INDOOR CANDELA PLOT

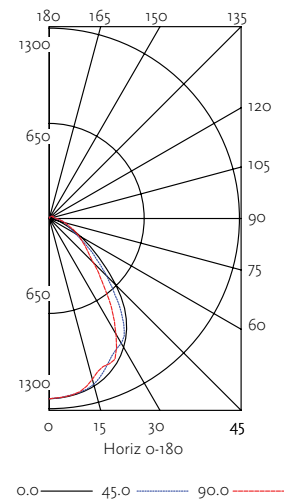

Zone	Lumens	% Lamp	%Fixt
0-30	1558	33.1	33.1
0-40	2437	51.7	51.7
0-60	3744	79.4	79.4
0-90	4425	93.9	93.9
0-180	4714	100.0	100.0

Total Luminance Efficiency	100.0%
Total Luminance per Watt	99
ANSI/IESNA RP-1-2004 Compliance	Noncompliant

Test 15387 Test Date 7/18/14
INDOOR CANDELA PLOT

