

PCVT SERIES

Wet Locations

Specifications:

Features:

- 150 watt maximum medium base incandescent
- Platinum silver protective finish
- PCTVW models have cast aluminum wall bracket with cast wiring box. Box has external lugs and four side ½" hubs for surface conduit and one rear ½" access hub
- PCTVS models have cast aluminum wiring box with external lugs for ceiling mount and four ½" hub for pendant mount
- Both models have water/bug tight gasketing
- Both models have medium base porcelain socket
- Both models include clear glass protective globe with thread-on cast aluminum guard. Guard includes vandal resistant set screw
- 120 V Input Voltage

Application:

The PCVTS is intended to be mounted on a ceiling or as a pendent while the PCVTW is intended to be mounted on a wall. Both can be applied to entries, corridors, tunnels, service areas, elevator wells, stairwells or retro-accent applications.

Compliances:

UL 1598 listed for use in wet locations (unit is not rated for use in hazardous locations)


Warranty:

1 year warranty (Terms and Conditions Apply)

Catalog number:


Base	Mount	Lamp
PCVT	S- Ceiling/Pendant W- Wall	Incandescent, 150 Watts

Images:



Dimensions:

Lugs: 5" center to center

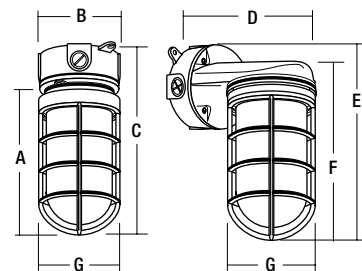

PCVTS

A: 7" (132 mm)
B: 4 1/2" (263 mm)
C: 9" (229 mm)
G: 4" (102 mm)

PCVTW

D: 7 1/4" (186 mm)
E: 9 3/4" (280 mm)
F: 8 1/2" (132 mm)
G: 4" (102 mm)