

Project: _____
 Fixture Type: _____
 Location: _____
 Contact: _____

PEALE SERIES

Thin Die-Cast LED Emergency Exit

Specifications:

Description:

The PEALE Series offers quality and value with a compact and attractive Thin Die-Cast aluminum Exit sign. Exit face illumination by low energy, long-life red or green ultra bright LED's. The Exit face-plate is brushed aluminum with black edges and 6" letters with a red or green diffuser. Single-face models can be wall, end or ceiling mounted. Double-face models are end or ceiling mounted only. Includes canopy, universal mounting plate and a battery for emergency operation. Test switch and AC-on indicator are located at bottom center. Directional indication made by knock-out chevrons.

Features:

- LED life-cycle of more than 10 years
- Molded-in template for Quick installation
- Dual-voltage 120 or 277V AC input
- Includes long-life 2.4 VDC Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- Damp Location Listed
- Provided with test switch and AC-On indicator
- Canopy included

Application:

The PEALE Series can be applied in stair-wells, hallways, offices and other commercial applications



Warranty:

2 year full unit warranty


Catalog number:

Base	Location	Face	Color	Emergency Battery	Finish
PE	ALE - Aluminum	S - Single D - Double	R - Red G - Green	EM - Emergency Battery	16 - Brushed Aluminium

Images:



Dimensions:

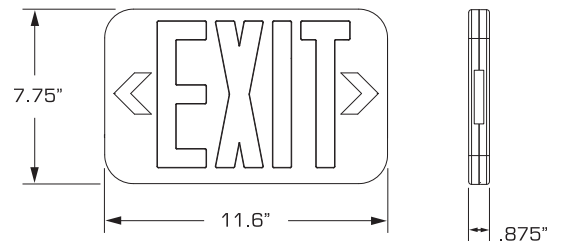

Compliances:

- UL924 Listed for Damp Location
- NFPA 101 and NFPA 70
- OSHA