

# PEEMB SERIES

## Emergency Battery Pack

### Specifications:

#### Description:

The PEEMB Series emergency battery pack can be installed in ballast channels and enclosures that have an internal height down to 1.15 inches. The PEEMB housing is constructed out of galvanized steel. The PEEMB Series works in tandem with an AC ballast to power one or two 2' - 4' single or Bi-pin T5 and T8 lamps.

#### Features:

- Can be used with switched or unswitched lighting fixtures
- Test switch, solid state charger with automatic transfer switch and LED charge indicator light
- Maintenance free Nickel-Cadmium battery
- Provides 90 minutes of emergency lighting
- Dual input 120/277 VAC, 60 Hz operation

#### Installation:

The PEEMB fluorescent emergency battery pack does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched AC power supply must also be connected to the PEEMB, and must be fed from the same branch circuit as the fixture's AC ballast. The PEEMB may be installed on or remote from the fixture. For remote installation, the PEEMB may be installed up to one-half the distance the AC ballast manufacturer recommends for remote location from the fixture, or up to 10 feet, whichever is less. The remote battery pack must be installed in its own enclosure or in a location that allows the wiring to be fully enclosed. Install the integral test switch for visual confirmation of the charge indicator LED and simplified testing.

Model	Input Wattage	Lamp Type	No. of Lamps
500 L	2.5W	2'-4', 20W-40W T8, T12, H0 OR VH0	1
700 L	3.7W	2'-4' 14W-54W T5, T8, 18W-50W (4-PIN) LONG COMPACT 32W(4-PIN) COMPACT 24W-32W USHAPE T8	1 (14-54W) OR 2 (14-39W)
1400 L	3.7W	2'-4' 14W-54W T5, T8, 18W-50W (4-PIN) LONG COMPACT 32W(4-PIN) COMPACT 24W-32W USHAPE T8	1 (14-54W) OR 2 (14-39W)

#### Catalog number:


Base	Lumens
<b>PEEMB</b>	<b>500 L</b> - 500
	<b>700 L</b> - 700
	<b>1400 L</b> - 1400

#### Images:




#### Dimensions:


##### 500 L

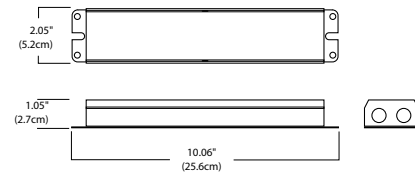

##### 700 L

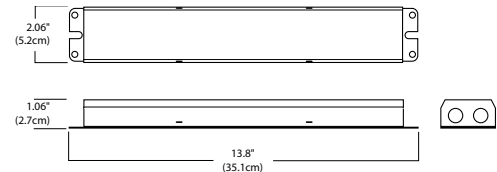

##### 1400 L

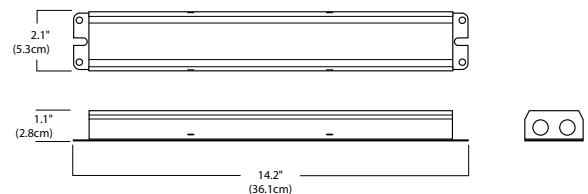

#### Warranty:

5 year full unit warranty

#### Compliances:

- UL924 Listed for Damp Location
- NFPA 101 and NFPA 70
- UL and CUL Listed PEEMB-500L