


Type _____

-10

P3736 ☐

Catalog No.	Finish Polished Brass	Lamping	Dimensions (Inches)		
			A	B	C
P3736	-10	3 (m) 100w	19-1/2	26-1/2	100

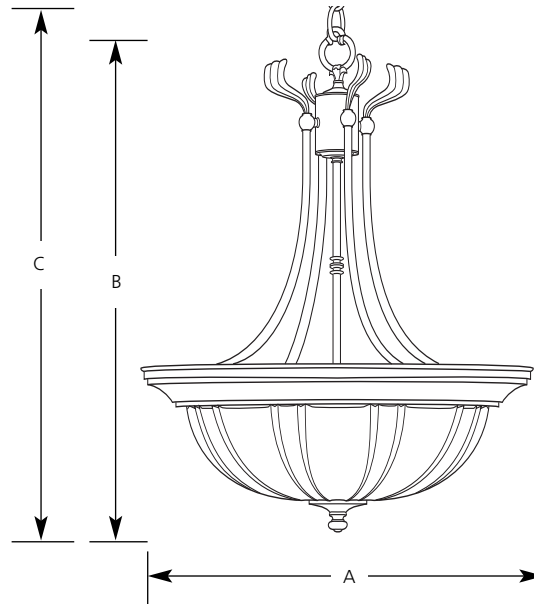

Specifications:

General

- Steel construction with Polished Brass finish
- Satin etched fluted glass bowl
- Cast flame accents
- 6 feet of 9 gauge chain
- Companion chandeliers, sconces, wall brackets, pendants, close to ceiling, bath and vanity, and table lamp

Mounting

- Chain hung ceiling
- Covers outlet box
- Mounting strap for outlet box included
- Canopy 5-1/2" diameter

Electrical

- 15 feet of wire
- Phenolic medium based socket
- Pre-wired

Labeling

- UL-CUL listed

P3736

PRESCOTT - CHAIN HUNG



Report No. 2000039

No. Lamps: 3 Type Lamp: 100A19 - GE Total Lumens: 5130

Fixture Efficiency: 51.2%


S/MH Ratio: 1.3

Quick Calculator Charts

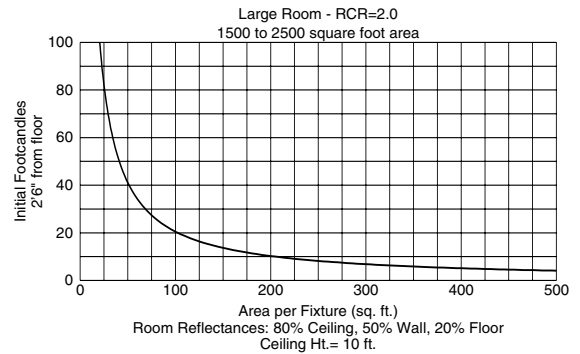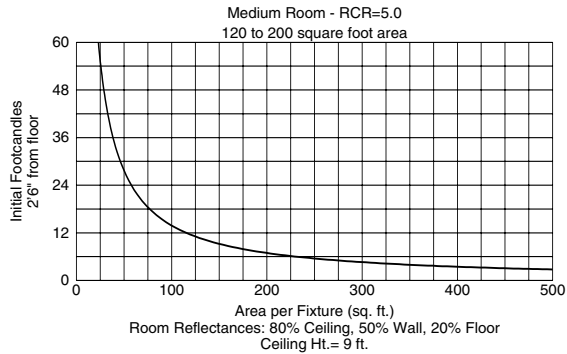

DISTRIBUTION CURVE

INTENSITY DATA

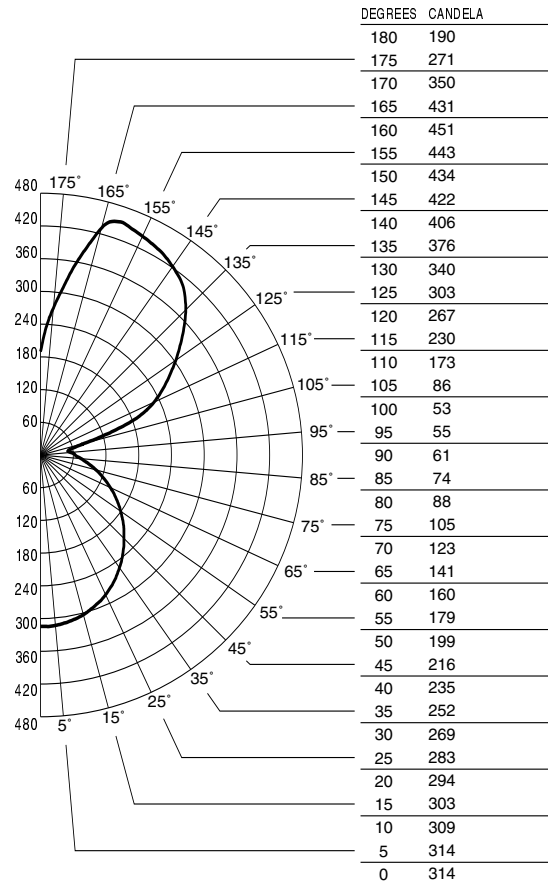

Single Fixture Data

	10% Values		Zero Degrees	50% Values	
Ceiling Ht.(Ft.)	Beam Angle - 112°			Beam Angle - 65°	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	1.0	16	10.4	5.2	7
10	0.6	22	5.6	2.8	10
12	0.3	28	3.5	1.7	12
14	0.2	34	2.4	1.2	15
16	0.2	40	1.7	0.9	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

		Effective Floor Cavity Reflectance 0.20															
		80				70				50				30			
RC		70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	10
RW	0	54	54	54	54	49	49	49	49	40	40	40	32	32	32	24	24
	1	48	46	44	42	44	42	40	38	34	33	31	27	26	25	20	20
	2	44	40	36	34	40	36	33	31	29	27	26	23	22	20	18	17
	3	40	35	31	28	36	32	28	25	26	23	21	20	19	17	15	14
	4	36	31	26	23	33	28	24	21	23	20	18	18	16	14	14	12
	5	33	27	23	20	30	25	21	18	20	17	15	16	14	12	12	11
	6	31	24	20	17	28	22	18	16	18	15	13	15	12	11	11	10
	7	28	22	18	15	26	20	16	14	16	14	12	13	11	9	10	9
	8	26	20	16	13	24	18	15	12	15	12	10	12	10	8	9	8
	9	24	18	14	11	22	16	13	11	14	11	9	11	9	7	8	7
	10	23	16	13	10	21	15	12	10	13	10	8	10	8	7	8	6