


	Type					
	-09A	-174A	-09B	-09R	-174PR	-09W -174W
P6174	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish		Glass	Lamping	Dimensions (Inches)		
	Brushed Nickel	Urban Bronze			A	B	C
P6174	-09A	-174A	Amber	12v T4 50w (Incl)	6	5-1/8	72
P6174	-09B	NA	Blue	12v T4 50w (Incl)	6	5-1/8	72
P6174	-09R	NA	Red	12v T4 50w (Incl)	6	5-1/8	72
P6174	NA	-174PR	Red Patterned	12v T4 50w (Incl)	6	5-1/8	72
P6174	-09W	-174W	White	12v T4 50w (Incl)	6	5-1/8	72

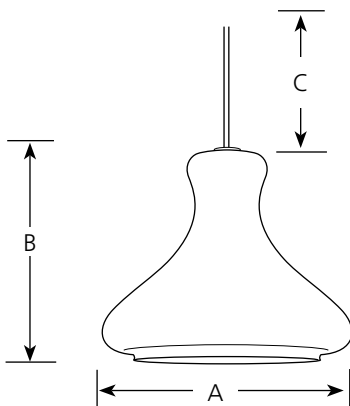

Specifications:

General

- Flex track mini-pendant
- Bell bottom glass with white interior
- Plated brushed nickel (-09) or urban bronze (-174) finishes
- One 50w T4 lamp included
- Mounts anywhere along Illuma-Flex track sections, or on monopoints
- Includes adapter that allows unit to be mounted to P8516 transformer for Alpha track system also.

Mini pendant Support

- A small wiring compartment is located just below the fitter to allow adjustment of cord length
- Cord is Teflon coated copper wire with a silicon sleeve that matches the finish

Electrical

- Attachment to 12 volt Illuma-Flex track with supplied track fitter, 120V Alpha-Track using supplied P8777 adaptor and P8516 Alpha-Track transformer or monopoint canopy (requires P8780 or P8794 accessory)
- Lamp has a GY6.35 bi-pin base

Labeling

- CSA-CSA/US listed