




Incandescent
Halogen

Illuma-Flex® Mini Pendant
Hourglass Shade
Low Voltage

Track

Type _____
-09BW -09CL -09PY
P6171

Catalog No.	Finish	Glass Shade	Lamping	Dimensions (Inches)		
	Brushed Nickel			A	B	C
P6171	-09BI	White & Black	12v T4 35w (Incl)	3-1/8	5-3/8	72
P6171	-09CL	Clear & Etched	12v T4 35w (Incl)	3-1/8	5-3/8	72
P6171	-09PY	Patterned Yellow	12v T4 35w (Incl)	3-1/8	5-3/8	72

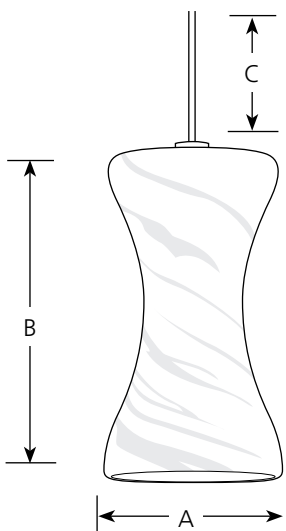

Specifications:

General

- Flex track mini-pendant
- Hourglass shaped glass shade.
- Glass with black pencil wrap (-BL), clear and etched (-CL), or patterned yellow mottled (-PY)
- Plated brushed nickel (-09) finish
- One 35w T4 lamp included
- Mounts anywhere along Illuma-Flex track sections, or on monopoints
- Includes adapter that allows unit to be mounted to P8516 transformer for Alpha track system also.

Mini pendant Support

- Attaches to Illuma-Track, P8516 transformer on Alpha track, or on P8780 monopoint with supplied fitter
- Can also be mounted on P8794 Designer monopoint by direct wiring.
- A small wiring compartment is located just below the fitter to allow adjustment of cord length
- Cord is Teflon coated copper wire with a

silicon sleeve that matches the brushed nickel finish

Electrical

- Attachment to 12 volt Illuma-Flex track
Remove top cap, slide onto track from below, replace cap and tighten to clamp unit to track
- Attachment to Alpha Track
Remove cord from Illuma-Flex fitter, attach to Alpha fitter (P8777) included. It attaches to P8516 Alpha track transformer (Order separately)
- Attachment to P8780 quick connect monopoint
Attach cord to P8777 fitter and twist into position on the monopoint
- Attachment to P8794 designer monopoint
Directly wire cord into canopy
- Lamp has a GY6.35 bi-pin base

Labeling

- UL-CUL listed

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com