


Type _____
 -01
 P8642

Catalog No.	Lamping	Dimensions (Inches)	
		A	B
P8642-01	18 & 26w Quad (2-pin)	9-1/2	2-3/8
		Case Height = 1-1/2"	

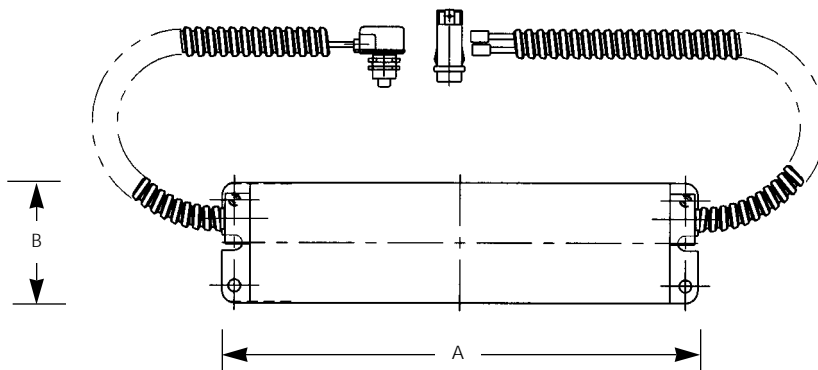

Specifications:

General

- Will cold start and operate all specified lamps
- Long-life, 3.6 volt high-temperature Ni-Cad battery
- Test switch and charge light included in an easy-to-install switch box
- 5-year warranty
- 90-minute emergency operation
- Battery is recyclable through RBRC - call 1-800 8BATTERY
- Can be used with any compact fluorescent fixture utilizing compatible lamps
- Includes switch enclosure box and cover plate

Lamps

- 18 & 26w quad tube 2-pin lamps with integral starter
- Initial lumen output is 650 for one lamp

Mounting

- For remote mounting only
- Maximum mounting distance is 50 feet or 1/2 AC ballast manufacturer's recommended maximum mounting distance, whichever is less

Electrical

- Dual voltage 120/277V, 60 Hz
- Meets or exceeds all NEC and NFPA Life Safety Code Emergency Lighting Requirements

Labeling

- UL listed

Construction

- Painted steel case
- All leads enclosed in flex conduit

Progress Lighting
 Post Office Box 5704
 Spartanburg, South Carolina
 29304-5704