


	Type				
	-09	-10	-30	-33	-74
PV005	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish					Lamping	Capacity	Sones	Volts	Amps	Housing Dimension (Inches)		
	Brushed Nickel	Polished Brass	White	Cobble- stone	Venetian Bronze						A	B	C
PV005	-09	-10	-30	-33	-74	2-60 (m)	70 CFM	3.5	120v	2.2a	8	8-1/4	5-3/4

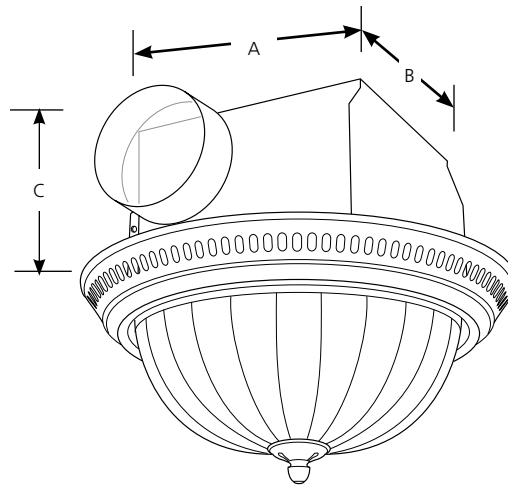

Specifications:

Trim/Grille

- One piece steel
- Plated (-10, -24 and -74) and painted (-30 and -33) finishes
- Center mount to housing
- Dimensions - 13-3/8" diameter and 5-7/8" deep (Including diffuser)

Diffuser

- Satin white glass
- Center mounts to Trim,/Grille
- Center finial matches trim finish

Housing

- Mounts to ceiling joists, or in suspended ceilings
- Can be mounted in sloped ceilings up to a 12/12 pitch
- Galvanized steel
- 26 gauge
- Mounting brackets with keyhole slots, and holes for ceiling wires
- Removable wiring cover for easy connections
- Internal wiring plate allows either top or side hole for conduit or BX fitter
- No KO's to remove
- Polymeric 4" round duct fitting for positive connection
- Quiet polymeric damper to prevent cold backdrafts with no metallic clatter

Motor

- 120 volt, 1.15 amp, permanently lubricated
- Plug in for ease of servicing
- Snaps in or out for ease of cleaning and servicing – no screws
- Specially designed polymeric blower wheel

Lamping

- Two 60 watt lamps
- Medium based sockets

Labeling

- cCSAus listed.
- Listed for use in insulated ceilings (IC listing)

Note: Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state of the art test laboratory. Sones are a measure of humanly perceived loudness based on laboratory tests.