


Type _____
 -30
 PV006 ☐

	Finish							Dimensions (Inches)		
Catalog No.	White	Lamping	Capacity	Sones	Volts	Heater	Amps	A	B	C
PV006	-30	1-100 (m)	70 CFM	4.0	120v	1100w	11.25a	14	8-1/2	6-1/4

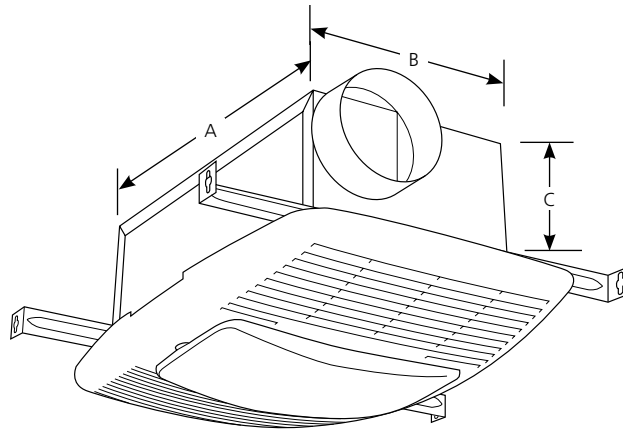

Specifications:

Trim/Grille

- One piece white polymeric plastic
- Two louvered areas are divided by the lamp diffuser, one side is for heater, the other for the vent
- Single center mount to housing
- Dimensions - 12" wide, 17" long, 2" deep (Including diffuser)

Diffuser

- White polycarbonate
- Snaps into Trim/Grille

Housing

- Mounts to ceiling joists, or in a suspended ceiling
- Can be mounted in sloped ceilings up to a 12/12 pitch
- Galvanized steel
- 26 gage
- Mounting brackets with keyhole slots, and holes for ceiling wires
- Removable wiring cover for easy connections
- Internal wiring plate allows either top or side hole for conduit or BX fitter
- No KO's to remove
- Tapered sleeve polymeric 4" round duct fitting for positive connection
- Quiet polymeric damper to prevent cold backdrafts with no metallic clatter

Motor

- 120 volt, 1.15 amp, permanently lubricated
- Plug in for ease of servicing
- Snaps in or out for ease of cleaning and servicing - no screws
- Specially designed polymeric blower wheel

Heater

- 1100 watt nickel chrome resistance heater
- The heater is a plug in modular unit for ease of replacement if necessary.
- The fan motor is an open C frame configuration with a five blade fan
- The heater is mounted in a separate housing at one end of the main housing

Lamping

- 100 watt lamp
- Medium based socket

Labeling

- cCSAus listed.
- Can be used over bathtubs and showers when connected to a GFCI protected branch circuit
- Listed for use in insulated ceilings (IC listing)

Note: Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state of the art test laboratory. Sones are a measure of humanly perceived loudness based on laboratory tests.