




**HVAC** protection  
SOLUTIONS

**Flaretite - Refrigeration & Gas Seals**  
The ultimate solution for preventing leaks!

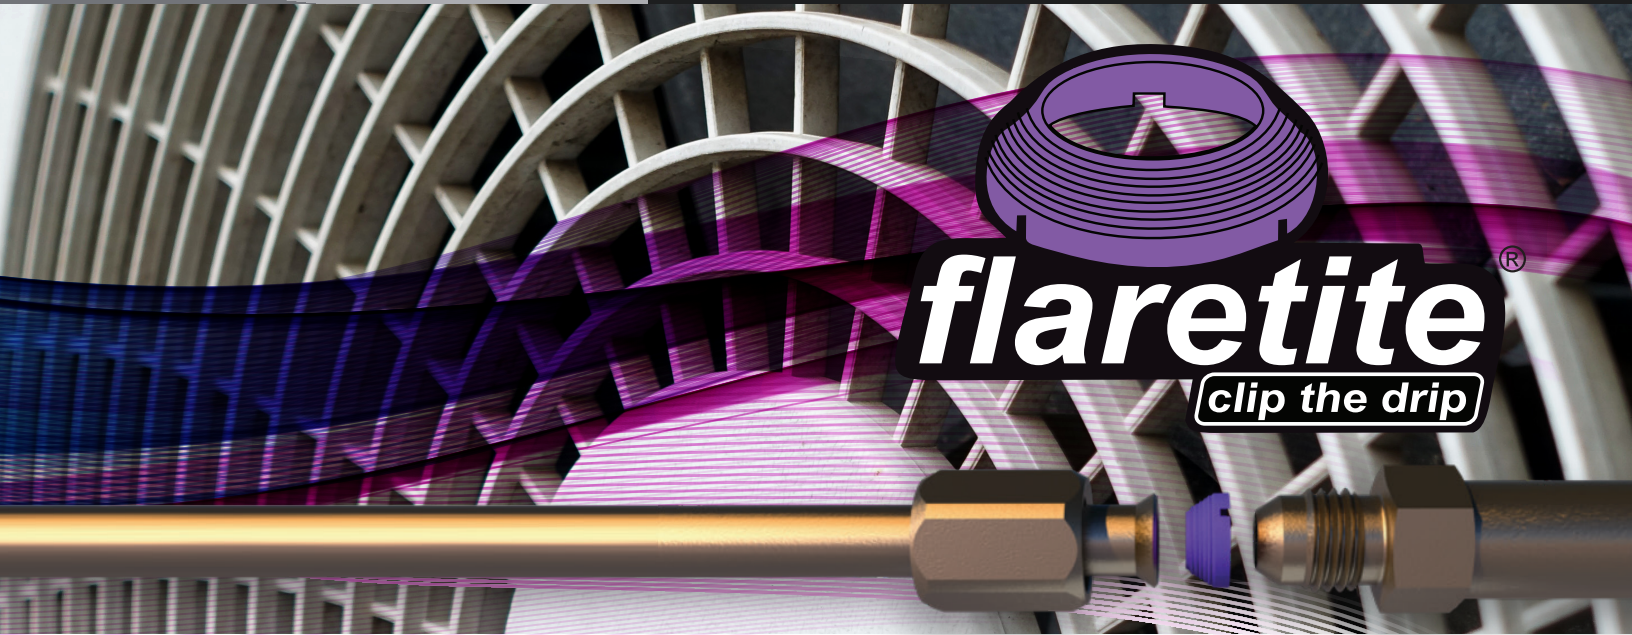

**flaretite**<sup>®</sup>  
clip the drip

## SLASH THE COSTS OF SERVICING, DOWNTIME & CALL BACKS.

COMPATIBLE WITH ALL COMMON REFRIGERANTS INCLUDING POE & PVE OILS




- For common aluminum and brass fittings.
- SAE (US Standard) 45° flare seals for inch tubing sizes.
- Stamped copper seal with standard Loctite Vibra seal coating.
- Rated for -40° F to 300° F temperature & all common gases & fluids.
- 5 sizes & 21 combinations: 1/4" • 3/8" • 1/2" • 5/8" • 3/4"

**GREAT FOR INSTALLING MINI-SPLIT  
& VRF SYSTEMS**

**APPLICATION** • Used to prevent leaks that are caused by galling, vibration, pulsation & extreme temp changes • A perfect solution for a leak free connection in today's harshest environments

**RECOMMENDED FOR**

- Service & repair
- Mini-Split & VRF installations
- Commercial chillers & coolers
- Marine & aviation refrigeration



Code	Description	Qty.
97210	Combo Kit - 9 seals each of sizes 1/4", 3/8", 1/2", 5/8" (36 seals total)	6 kits/case
97211	Combo Kit - (2) 3/8", (2) 3/4"	10 kits/case
97212	Combo Kit - (2) 3/8", (2) 5/8"	10 kits/case
97213	Combo Kit - (2) 3/8", (2) 1/2"	10 kits/case
97214	Combo Kit - (2) 1/4", (2) 5/8"	10 kits/case
97215	Combo Kit - (2) 1/4", (2) 1/2"	10 kits/case
97216	Combo Kit - (2) 1/4", (2) 3/8"	10 kits/case
97217	(10) 3/4" Seal Kit	10 kits/case
97218	(10) 5/8" Seal Kit	10 kits/case
97219	(10) 1/2" Seal Kit	10 kits/case
97220	(10) 3/8" Seal Kit	10 kits/case
97221	(10) 1/4" Seal Kit	10 kits/case
97226	(100) 3/4" Seal Kit	4 kits/case
97227	(100) 5/8" Seal Kit	4 kits/case
97228	(100) 1/2" Seal Kit	4 kits/case
97229	(100) 3/8" Seal Kit	4 kits/case
97230	(100) 1/4" Seal Kit	4 kits/case

**FEATURES**

- 45° Copper Stamping with Loctite coating
- Locking tabs clip seal securely on fitting
- Conical rings for multiple points of contact
- Made for all common 45° fittings
- Rated for -40° F to 300° F
- Pressure rated up to 10,000 psi

**Manufacturer's Torque Specifications (ft-lbs)**

	1/4"	3/8"	1/2"	5/8"	3/4"
Daikin	10.4 -12.7	24.1 -29.4	36.5 -44.5	45.6 -55.6	71.7 -87.5
LG	13.9 -18	24.5 -30.3	39.7 -47.7	45.5 -59.2	71.61 -87.52
Fujitsu	11.8 - 13.3	23.6 - 31.0	36.1 - 45.0	46.5 - 55.3	66.4 - 81.1
Mitsubishi	10 -13.1	25 -30	36 -42	54 -58	-
Gree	10 -13.1	25 -30	36 -45	50 -60	-

**Flaretite Recommended Torque Specifications (CU-SPP)**

1/4"	3/8"	1/2"	5/8"	3/4"
14 -18 ft-lbs	24 -30 ft-lbs	40 -47 ft-lbs	46 -59 ft-lbs	72 -86 ft-lbs

**WARNING** This product can expose you to Crystalline Silica, which is known to the State of California to cause cancer. For more information go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**RectorSeal, LLC 2601 Spenwick Drive - Houston, TX 77055 800-231-3345 [rectorseal.com](http://rectorseal.com)  
 PO Box 5092 Hoppers Crossing, VIC 3029, Australia 1300 77 2878 [rectorseal.com.au](http://rectorseal.com.au)**

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. Flaretite is a registered trademark of Flaretite, Inc. Corp. ©2021 RectorSeal. All rights reserved. R50391-1021