

# REGINA ANDREW

DETROIT

## ITEM NO: 16-1410 Dogwood Chandelier

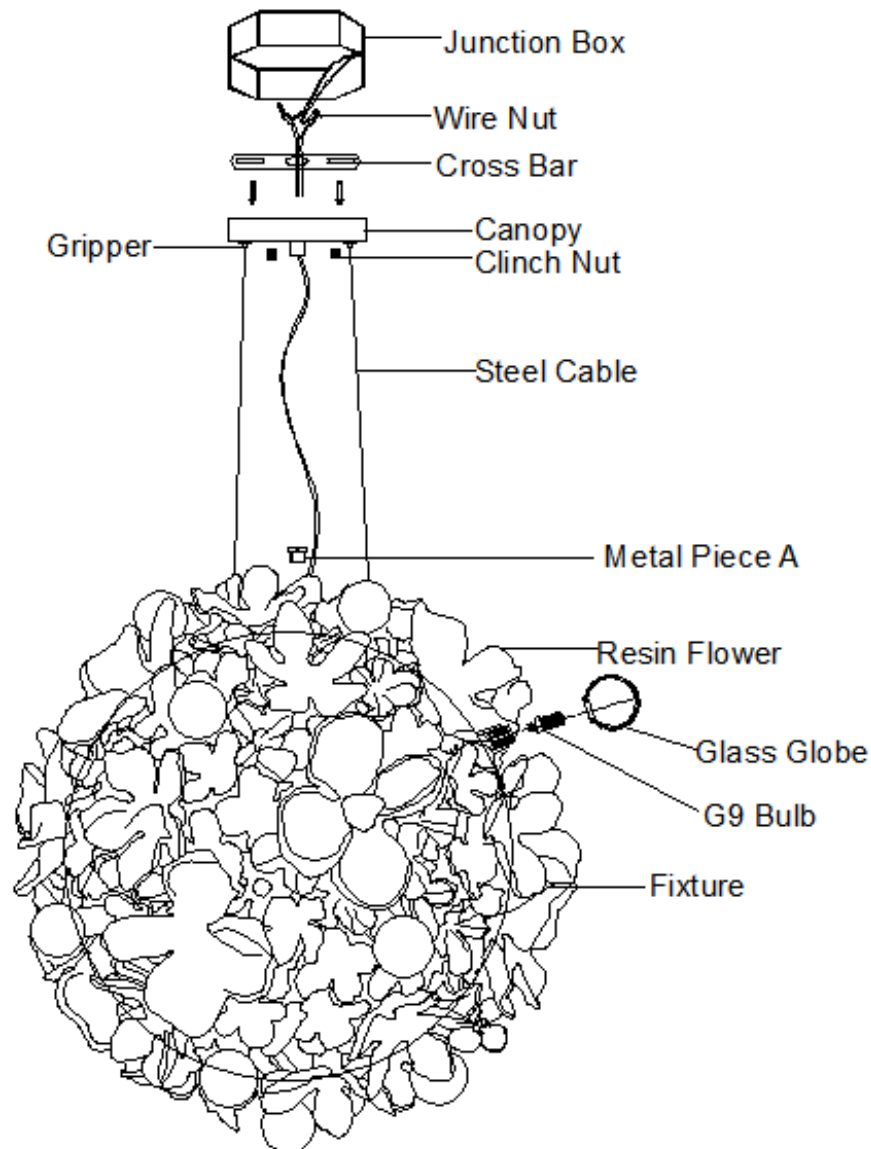
CAREFULLY INSPECT THE ITEM BEFORE INSTALLATION.

WE STRONGLY RECOMMEND THE ITEM BE INSTALLED BY A LICENSED ELECTRICIAN.  
These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

### ASSEMBLY INSTRUCTIONS

#### FOR WIRING DIRECTLY INTO THE JUNCTION BOX (Figure 1)

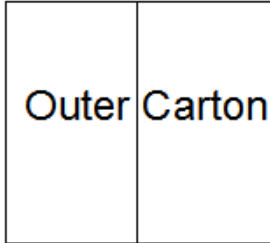
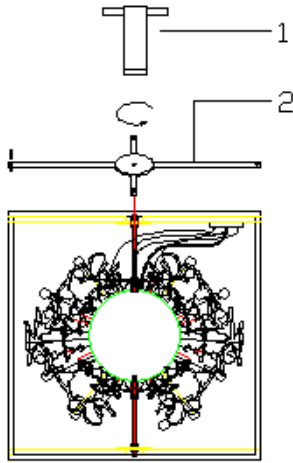
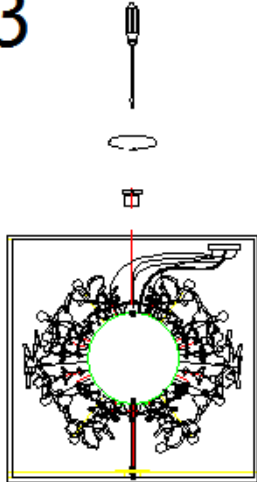
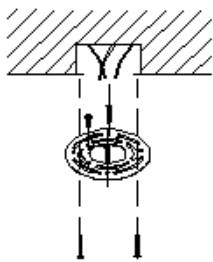
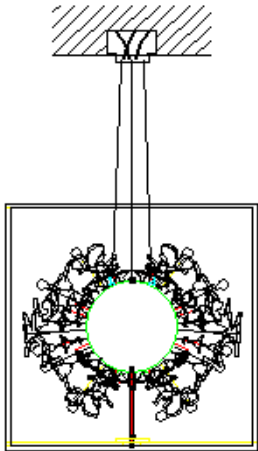
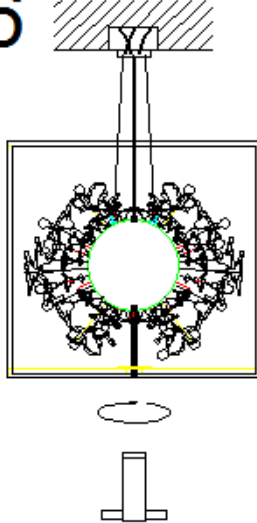
1. Turn off the breaker to the junction box at the electrical panel.
2. Inspect all parts and inventory, making sure to check all sides of the packaging for additional parts.
3. Determine the desired height of the fixture. Press the gripper down and adjust the steel cable to the proper height, then loosen the gripper.
4. Trim the electrical cords to length, making sure to leave an extra 6-10 inches to make all connections.
5. Install the crossbar onto the junction box with the included machine screws.
6. Run all electrical into the junction box. Attach ground wire from fixture to ground wire from junction box. Fasten wires together with wire nut and tightly wrap connection with electrical tape. Attach hot wire from fixture (black color or smooth side of wire) to hot wire from junction box. Fasten wires together with wire nut and tightly wrap connection with electrical tape. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from junction box. Fasten wires together with wire nut and tightly wrap connection with electrical tape. Carefully push wire connections back into ceiling junction box.
7. Carefully slide the canopy up over any extensions and secure it to the crossbar by provided clinch nuts.
8. Screw the metal piece A to the fixture.
9. Screw the socket at the bottom of fixture onto the fixture and tighten it.
10. Assemble all additional decorative parts and G9 bulbs (bulb included) into the sockets.
11. Install the glass globes onto the sockets.
12. Turn the breaker to the junction box back on and enjoy.



Made in China



# Packaging Instruction

<p><b>P1</b></p>  <p>Outer Carton</p> <p>1. Open the carton, remove all parts from package and all plastic covering.</p>	<p><b>P2</b></p>  <p>2. Loosen the nut in the middle of cross using a sleeve, and remove the screw with a phillips screwdriver, then remove the cross.</p>	<p><b>P3</b></p>  <p>3. Insert the metal piece into the hole where the screw was just removed.</p>
<p><b>P4</b></p>  <p>4. Install the crossbar onto the junction box with the included machine screws.</p>	<p><b>P5</b></p>  <p>5. Uplift the square metal frame and fixture, connect the wires according to No. 5 and No.6, install the canopy according to No.7.</p>	<p><b>P6</b></p>  <p>6. Remove the screws at the bottom of metal frame using the sleeve, and remove the metal frame.</p>

