

872.241.0016
Toledo, Ohio
sales@renesinks.com
Renesinks.com

VESSEL SINKS

Installation Guide

THE INSTALLATION OF ANY VESSEL-STYLE SINK

Vessel sinks are designed to be mounted upon the countertop. They are available in porcelain, glass, bronze, and copper. For models which have a rounded bottom, a sink ring is typically installed below the basin in order to stabilize it.







872.241.0016
Toledo, Ohio
sales@renesinks.com
Renesinks.com

VESSEL SINKS

Installation Guide

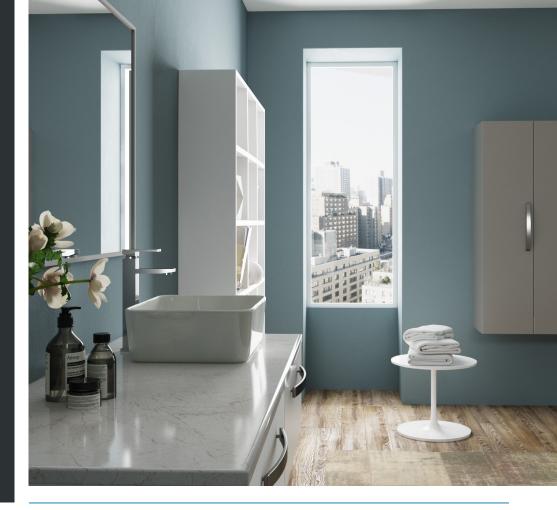

ABOVE COUNTER



THE STEPS

- Measure and cut a hole in the countertop matching the diameter of the drain pipe.
 - *A larger hole may be required to accommodate a thicker sink bottom
- If the bowl has a curved bottom it will require a sink ring. Position the ring on the counter over the drain hole, then rest the basin on the ring.
- If the bowl has a flat bottom it can be rested directly on the counter without a sink ring.
- · Install the drain.

