



Indoor Comfort Products Brought to You
by the Manufactured Home Experts!

Self-Contained Packaged Heat Pumps (SEER2)



2023 DOE-Compliant Models meet the 13.4 SEER2 performance minimums, and have been tested in accordance with new “M1” testing standards for all cooling equipment.

Competitive, Compact Footprints will fit some of the most aggressive lot lines, and allow for easier transportation and installation.

High-Static Blower utilizes a high-efficiency, 5-speed, fixed-torque, brushless-DC ECM.


Advanced Refrigeration Technology including a factory-installed, Bi-flow, liquid line filter-drier, patented hot gas defrost, and a factory-supplied Bi-metallic Outdoor Thermostat.

Optional Electric Heater Kits are available for field-installation in Air Conditioners or Heat Pumps, ranging from 5-15 kW output.

Convenient Service Access to all control components, compressor, evaporator coil, and indoor blower; with perimeter high and low-side refrigerant ports.

Aluminum Micro-Channel Coils are designed to optimize heat transfer, minimize footprint, decrease materials cost, reduce refrigerant volume, and resist formicary corrosion to promote longer service-life.

Dependable Warranty handled directly by Style Crest’s dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing Industry.

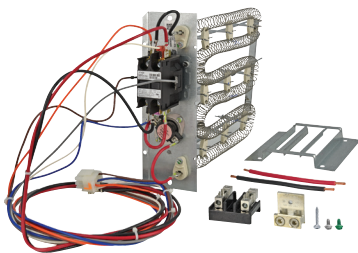

H3HK Electric Heater Kit
(Sold Separately)



www.stylecrestinc.com | 800.945.4440

Self-Contained Packaged Heat Pumps (SEER2)

| Nominal Tons ¹ | Style Crest Item # & Model | AHRI Cert. # | Cooling Capacity | SEER2 | EER2 | Heating Capacity | HSPF2 | R-410A Charge | MCA ² | MOP ² | Sound |
|---------------------------|----------------------------|--------------|------------------|-------|------|------------------|-------|---------------|------------------|------------------|-------|
| 2 | RQ94RD-024K | 209853116 | 23 MBH | 13.4 | 10.6 | 22.8 MBH | 6.7 | 75.8 Oz | 16.2 | 25 A | 77 dB |
| 2.5 | RQ94RD-030K | 209853117 | 28.6 MBH | 13.4 | 10.6 | 28.6 MBH | 6.7 | 73.8 Oz | 18.7 | 30 A | 78 dB |
| 3 | RQ94RD-036K | 209853118 | 34.2 MBH | 13.4 | 10.6 | 34.2 MBH | 6.7 | 70.6 Oz | 24.6 | 40 A | 77 dB |
| 3.5 | RQ94RD-042K | 209853120 | 40 MBH | 13.4 | 10.6 | 40 MBH | 6.7 | 97.4 Oz | 29.3 | 45 A | 77 dB |
| 4 | RQ94RD-048K | 209853121 | 45.5 MBH | 13.4 | 10.6 | 46 MBH | 6.7 | 99.5 Oz | 31.4 | 50 A | 77 dB |
| 5 | RQ94RD-060K | 209853122 | 56 MBH | 13.4 | 10.6 | 58.5 MBH | 6.7 | 106.1 Oz | 44.5 | 70 A | 73 dB |


1) Refer to AHRI listings for actual capacities and performance data.

2) Electrical data for unit-only, which would not include the addition of any field-installed electric heater.

| Nominal Tons ¹ | Style Crest Item # & Model | Item Width | Item Depth | Item Height | Minimum Pad Size | Ship Width | Ship Depth | Ship Height | Ship Weight | UPC |
|---------------------------|----------------------------|------------|------------|-------------|------------------|------------|------------|-------------|-------------|--------------|
| 2 | RQ94RD-024K | 49" | 35" | 30 13/64" | 49" x 35" | 51" | 37 1/2" | 31" | 286 lbs | 663132448395 |
| 2.5 | RQ94RD-030K | 49" | 35" | 30 13/64" | 49" x 35" | 51" | 37 1/2" | 31" | 288 lbs | 663132448364 |
| 3 | RQ94RD-036K | 49" | 35" | 30 13/64" | 49" x 35" | 51" | 37 1/2" | 31" | 300 lbs | 663132448333 |
| 3.5 | RQ94RD-042K | 63" | 35" | 38 13/64" | 63" x 35" | 65" | 37 1/2" | 39" | 348 lbs | 663132448302 |
| 4 | RQ94RD-048K | 63" | 35" | 38 13/64" | 63" x 35" | 65" | 37 1/2" | 39" | 353 lbs | 663132448272 |
| 5 | RQ94RD-060K | 63" | 35" | 38 13/64" | 63" x 35" | 65" | 37 1/2" | 39" | 353 lbs | 663132448241 |

Packaged Unit Accessories

| Style Crest Item# | Item Description |
|-------------------|---------------------------------------|
| H3HK005H-01C | Nominal 5kW, Heater Kit, 240V/1/60 |
| H3HK008H01B | Nominal 8kW, Heater Kit, 240V/1/60 |
| H3HK010H-01C | Nominal 10kW, Heater Kit, 240V/1/60 |
| H3HK015H-01C | Nominal 15kW, Heater Kit, 240V/1/60 |
| 294941 | Duct Collar, 12"Ø, Round, Metal |
| 294942 | Duct Collar, 14"Ø, Round, Metal |
| 1039295 | Single Circuit Adapter, 4-Pole |
| 913554 | Circuit Breaker, 1-Phase, 2-Pole, 60A |
| 1013934 | Tie Down Kit, High Wind, Pkg'd Units |

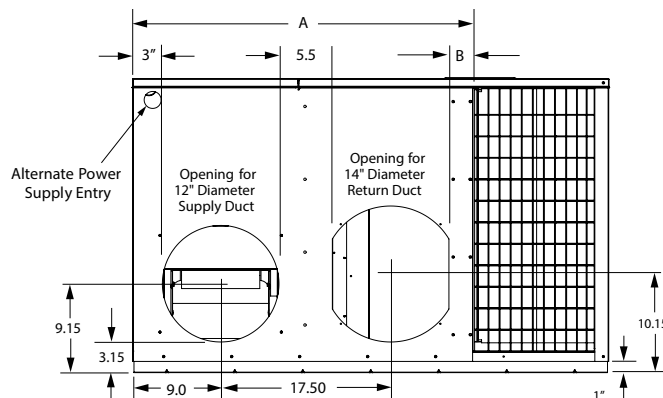

Packaged System Accessories

| Item # | Item Description |
|---------|--|
| 1181225 | Flex Duct, 12"Ø, 25ft L, R-8 Fiberglass |
| 1181425 | Flex Duct, 14"Ø, 25ft L, R-8 Fiberglass |
| 112012 | RA Filter Box & Trunk Line Connector |
| 1113038 | Plastic Pipe Strap, 100ft x 3/4" x 0.05" |
| 110225 | Nylon Draw Bands, 36"L, 50-Pack |
| 110248 | Nylon Draw Bands, 48"L, 50-Pack |
| 6014932 | Duct Strap, Woven Fabric, 100ft x 1 3/4" |

| Item # | Item Description |
|----------|-----------------------------------|
| 11121010 | Metal Wye Adapter, 12"Ø x 2-10" Ø |
| 11121212 | Metal Wye Adapter, 12"Ø x 2-12" Ø |
| 111412 | Metal Wye Adapter, 14"Ø x 2-12" Ø |
| 11141414 | Metal Wye Adapter, 14"Ø x 2-14" Ø |
| 1112108 | Round Duct Transition, 12"Ø-10"Ø |
| 1114128 | Round Duct Transition, 14"Ø-12"Ø |