

- Includes mirror defogging
- Dimmable LED task lighting to 1%
- Compatible with most Triac/Phase-cut dimmers
- Energy efficient LED lighting:

| | | |
|------------------------------------|----------|----------|
| Kelvin | 2700 | 4000 |
| CRI | 90+ | 90+ |
| Lumens* | 746-1488 | 746-1488 |
| Lux** | 485 | 485 |
| R9 Value* | 50+ | 50+ |
| Foot-candles** | 45 | 45 |
| Watt Output - LED | 32 | 32 |
| Watt Output - LED with defogger on | 52 | 52 |

* Based on a measurement of subset of sizes, shapes and lighting styles

** Measured at 18" from center of the mirror

Construction

- Anodized aluminum back frame
- Quality polished edge mirror
- Power cords installed for easy plugin installation
- Constructed for surface mounting
- Includes installation hardware


Codes/Standards Applicable

Vitality Mirror is UL certified to:

- UL 962
- CSA-C22.2, No. 12-82


Dimensions

Height: 30" (762 mm)
 Width: 24" (610 mm)
 Depth: 1-3/4" (45 mm)

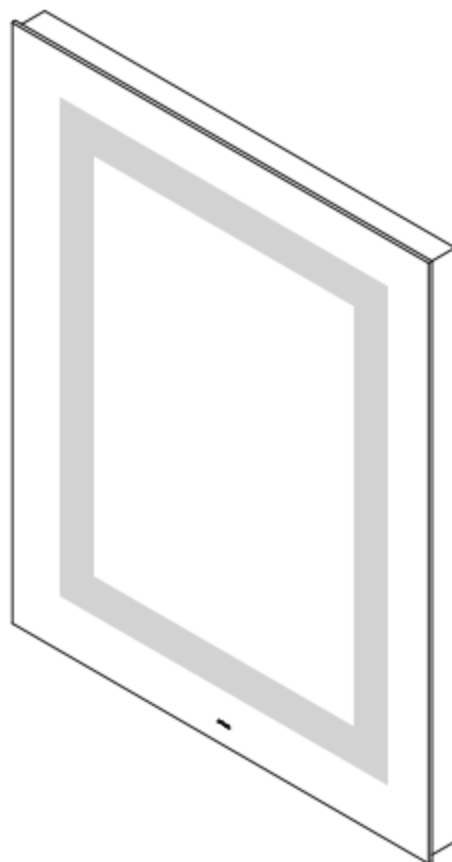

Model Number Key

| Vitality | Mirror | Width | Height | Shape | Light Pattern | Edge Type | Options | Color Temp |
|----------|--------|-------|--------|---------------|---------------|---------------------|--------------|------------------------|
| Y | M | 24 | 30 | R = Rectangle | I = Inset | FP = Flat, Polished | D = Defogger | 3 = 2700K 4 = 4000K |

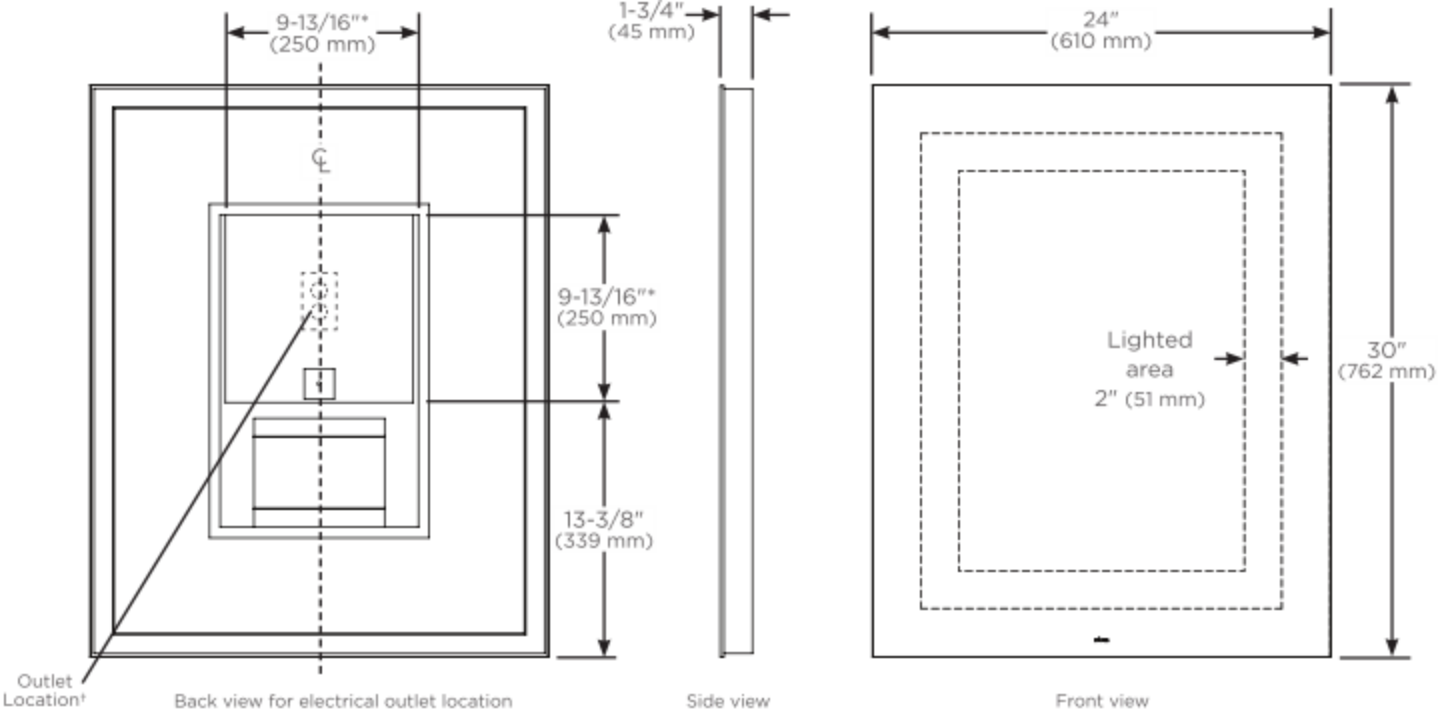

* Defogger Size

† See instructions for wiring and location