

CC2440D4TF Craft Series Cabinet - Specification Sheet

Features

- Metal Framed Mirrored Cabinet
- All cabinets are non-handed/reversible
- Mirrored interior with 4 adjustable, cantilevered glass shelves
- Cantilever shelving adjustable in 1" increments
- Includes installation hardware for recess mounting
- Can be recessed or surface mounted (surface mounting kit required)
- Blum 155° slow close hinges

Optional Features & Upgrades

- PORTRAY Quick Caddy (QUICKCADDY)
- PORTRAY Electric Upgrade (P2ELECTRIC)
- Other widths/heights available: 20" wide, 30" high
- Glass Bins (GLASSBIN3.25, GLASSBIN5.25, GLASSBIN8.5)

Construction

- Rust free Satin anodized aluminum construction
- Blum hinges standard
- 3 mirror design rear of cabinet and both sides of door

Codes/Standards Applicable

- Electric Option Models are ETL certified to:
 - UL 962
 - CSA Standard C22.2 No. 68

Dimensions

Width: 23-1/4" (591 mm) Height: 39-3/8" (1000 mm)

Depth: 4-3/4" (121 mm) When surface mounted


1-1/16" (26 mm) When recessed

Installation Options

Recessed Mount - Rough Opening - 22-1/2" W x 38-5/8" H x 4" D (572 mm W x 981 mm H x 102 mm D)

Surface Mount (Single Cabinet) - Reference Surface Mount Kit

when ordering (P2SMKIT)

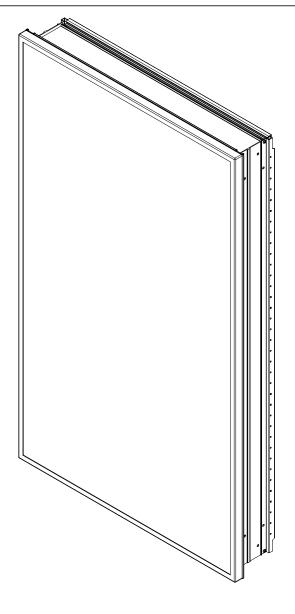

Model Number Key						
Craft Cabinet Series	Width	Height	Depth	Frame Style	Frame Finish	Package Option
СС	24	40	D4	TF = Thin Frame Metal	68 = Iron Black	SC = Slow Close
					69 = Brushed Pewter	TU = Slow Close, Electric Upgrade
					87 = Aged Brass	

Page 1 of 2 229-1671 USA/Canada: 1.800.877.2376 www.robern.com

Electrical System

- 120 VAC 60HZ 20A
- Field wire location as shown in drawing
- 1/2" conduit (Ø 7/8" actual) electrical knockout location shown below

