




# PERRIN & ROWE® 3/4" CONCEALED WALL VALVE ROUGH


ROHL Perrin & Rowe® Bath

**U.3240R** 



# **U.3240R Spare Parts**

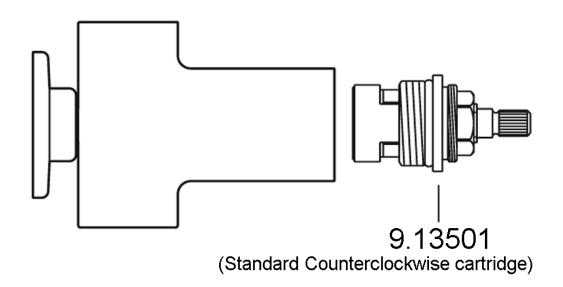








The Traditional Bathroom Collection

Installation & User Guide

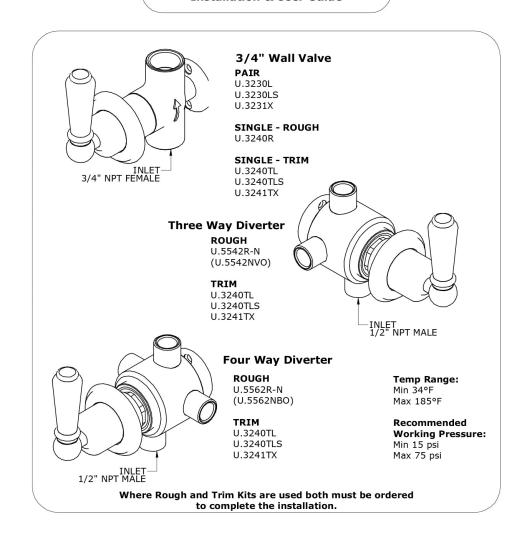



# The Traditional Bathroom Collection Installation & User Guide

Congratulations on the purchase of your Perrin & Rowe Bathroom Product. Correctly installed and with sensible care, this product will give you many years of trouble free service.

#### **IMPORTANT INFORMATION**


Before you proceed... We recommend you engage the services of a registered plumber to install this product.


In addition to the guide below it is essential that the written information overleaf is carefully read and understood.

#### **Preparation for Installer**

Once unpacked remove Trim Kit ready for Flush the plumbing system before installing the bathroom product. installation. **INSTALLATION OF** 3/4" NPT MIN 2 3/8" MAX 3 1/2" **ROUGH KITS** U.3420R Follow placement dimensions supplied Ø1 3/4" for installation. When installing products make sure allowance is made for Concealed Single Wall Valve 1 1/4" Max Wall Thickness tiles etc. 1/2" NPT MIN 2 7/8' MAX 4 1/8" Cavity should be sufficent to allow for servicing of valves. **U.5542NVO** /5" **Multiple Ports** 3 1/2" If only 2 functions are to be utilized, do not plug the unused port, instead loop the exit to a fuctioning 1/2" NPT Three Way Diverter port. MIN2 7/8" MAX 4 1/8' 1/2" NPT FUNCTION LOOP U.5562NVO FUNCTIO 3 1/2" 1/2" NPT , 1/2" NPT Four Way Diverter 1/2" NPT INLET



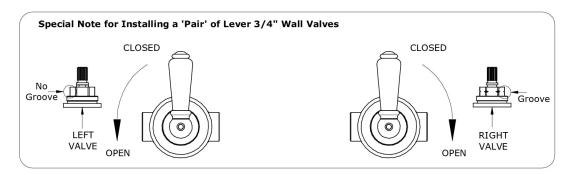

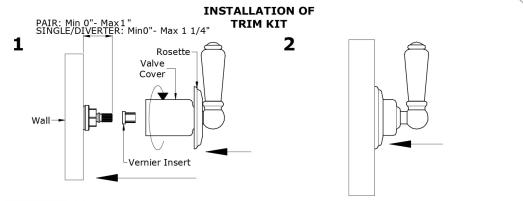

#### U.3233 5/8" Extension. U.3243 1 1/4" Extension.

Required if Rough Kit is outside the above Min - Max figure.

If required screw Extension over Rough Kit before carrying out Trim Kit Installation.

#### **Concealed Wall Valve**

Ensure the handle is vertical when the valve is in the 'off' position.

If required the Vernier Insert can be removed and turned a few splines until correct alignment is achieved.

#### Three & Four Way Diverter

For ideal operation, place the handle vertically when the diverter is fully open on one port.

If required the Vernier Insert can be removed and turned a few splines until correct alignment is achieved.

#### OPERATION

Ceramic disc valves are fitted as standard to the Wall Valves. Flow from FULLY OFF to FULLY ON is achieved by rotating the handles a quarter turn.

#### **BEFORE USE**

- $\bullet$  Carefully check the installation for leaks.
- If further building work is to be carried out in the vicinity, cover the fitting to avoid damaging the finish.
- Please ensure that the installation complies with the local plumbing codes.



#### **CARE & MAINTENANCE**

Occasional cleaning with warm soapy water, followed by a polish with a soft cloth is all that is required to keep the plated finish in good condition.

Do not use proprietary abrasive liquids, powders, or pads to clean the product. You will damage the plated finish and void your guarantee.


#### **ROHL WARRANTY POLICY**

All products supplied by ROHL carry warranties against manufacturing defects.

Perrin & Rowe products carry a Limited Lifetime Warranty.

ROHL LLC will provide free of charge, as its options, replacement part(s) or product (or a comparable alternative product) to replace those which have proven defective in materials or workmanship.

For full ROHL LLC WARRANTY please contact ROHL or visit www.rohlhome.com

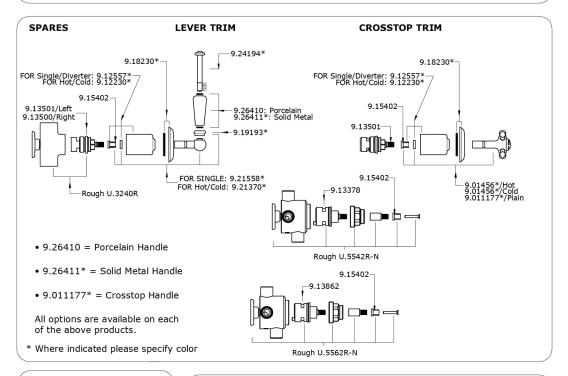

### SPARE PARTS & SERVICE

Authentic Luxury for Kitchen and Bath 3 Parker

Irvine CA 92618 (714) 557-1933

www.rohlhome.com

Perrin & Rowe products are manufactured in the UK, using the latest technology and built to the highest quality standards.

We would like to thank you for purchasing a Perrin & Rowe product and take this opportunity to invite you to look at other luxury products by us. Please contact us to receive our latest product catalogue.

Perrin & Rowe is a registered trademark.

9003230U

Issue 4