


# REL20 Series

120/277V AC

Catalog #:		Type
Project:		Date
Prepared by:		

## Compact Emergency

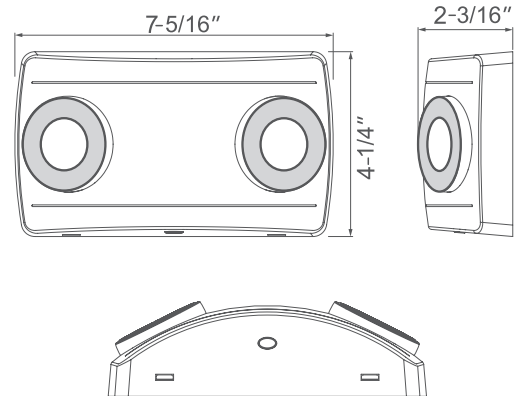

REL20 - Compact Emergency

### DESCRIPTION

Simple and compact, this emergency unit has an option for a Narrow Lens or a Cold Weather option. The adjustable lenses allow you to make sure the light goes where you want.

### DESIGN FEATURES

#### Construction

- Injection molded thermoplastic ABS housing with 5VA flame retardant
- Adjustable Clear Lens Heads

#### Electrical

- 120/277V, 60Hz
- Standard Operating Temperature: 10°C (50°F) to 40°C (104°F)
- Cold Weather Option Operating Temperature: -10°C (14°F) to 40°C (104°F)
- Adjustable Heads: 2 x 1W | 160 lms total
- Standard Battery: 3.6V, 800 mAh Ni-Cad
- Cold Weather Battery: 3.6V, 1500 mAh Ni-MH
- Manual test switch and LED indicator
- 90 minutes of illumination in case of power failure

#### Installation

- Suitable for ceiling and wall mount over standard recessed J-Box configuration
- Top and side knockouts for conduit applications

#### Dimensions

- 7-5/16" W x 2-3/16" D x 4-1/4" H

#### Certifications

- UL Listed for damp location to UL924 standards
- Meets and exceeds all appropriate NFPA life safety codes
- LED Light Source: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

### ORDERING GUIDE

Example: REL20-N

Model #	Options
REL20	
REL20	-N : Narrow focal lens -C : Cold weather option

For Wide Lens only option, please refer to REL20-1 Spec Sheet.

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.



LED Light Source

Other Components

2/6/23 R4



RP LIGHTING · FANS

# REL20 Series

120/277V

## Spacing Information

