


8708

120V

| | | |
|--------------|--|------|
| Catalog #: | | Type |
| Project: | | Date |
| Prepared by: | | |

4" LED Round Retrofit Downlight

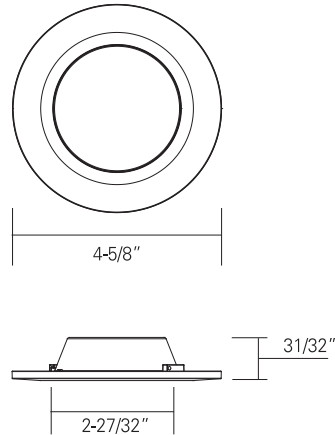

DESCRIPTION

A slim profile, small aperture downlight that fits in a 4" octagonal j-box with multiple trim-ring finish accessories. Wet location listing, IC rating, and wide distribution makes this an excellent choice for simple illumination in hallway and bathroom applications.

DESIGN FEATURES

Construction


- Durable aluminum construction
- Polycarbonate frosted lens

Electrical

- 120V-60Hz
- Dimmable TRIAC or ELV, 10-100%
- 50,000 hour projected life
- 80 CRI | 12W | 943 lms (delivered)
- 90 CRI | 11W | 691 lms (delivered)
- 3000K or 4000K
- Beam Angle: 110°
- Operating temperature: 14°F - 104°F

Installation

- Simple and easy installation - light engine and trim connects via twist and lock
- Installs in 4" Octagonal ceiling j-box (min 2" depth); j-box supplied by others

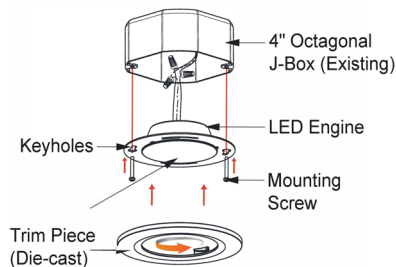

Die Cast Trim (sold separately)

- 4-JBR-BK: Black
- 4-JBR-BN: Brushed Nickel

Certifications

- cCSAus Listed for wet location
- Energy Star Listed - 8708-90
- CEC JA8 Compliant - 8708-90
- IC Rated
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (C)(1)

ORDERING GUIDE

Example: 8708WH-90-3K

| Model # | Finish | CRI | CCT |
|----------------------|------------|---|----------------------------|
| 8708 | WH | | |
| 8708 | WH : White | -80 : 80 CRI -90 : 90 CRI | -3K : 3000K -4K : 4000K |
| Accessory | | Finish | |
| 4-JBR-BK 4-JBR-BN | | Black Trim Ring for 8708 Brushed Nickel Trim Ring for 8708 | |

For Square Trim, refer to 8709 Specification Sheet

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



3/16/22 R2

