

## 4" LED CEILING LUMINAIRE INSTALLATION INSTRUCTIONS

**⚠ WARNING**

1. Supply conductors (power wires) connecting the fixture must be rated minimum 90°C . Consult an electrician.
2. Disconnect power at fuse or circuit breaker before installing or servicing.

**CAUTIONS :**

1. For your safety read and understand instructions completely before starting installation.
2. These luminaires (fixtures) are designed to meet the latest NEC requirements and are listed in full compliance with UL 1598.
3. Before attempting installation, check your local electrical code, as it sets the wiring standards for your locality.

### INSTALLATION ONTO OUTLET BOX


1. Twist trim counter-clockwise to remove from LED Module.
2. Attach the fixture to the outlet box by fastening supplied 1½" outlet box screws through canopy keyholes. Make sure LED Module is flush to the ceiling. (FIG. 1)
3. Replace the trim back on to the LED Module by reversing step 1.

### ELECTRICAL CONNECTIONS

Using customer supplied 90°C minimum rated wire connectors, make the following electrical connections within the junction box:

- a. Connect the black fixture lead to the voltage supply lead.
- b. Connect the white fixture lead to the neutral supply lead.
- c. Connect the green or green/yellow ground lead to the supply ground lead.

SUPPLY WIRING	JUNCTION BOX		LUMINAIRE
LINE	●	LINE-BLACK	
NEUTRAL	●	NEUTRAL-WHITE	
GREEN	●	GROUND-GREEN	

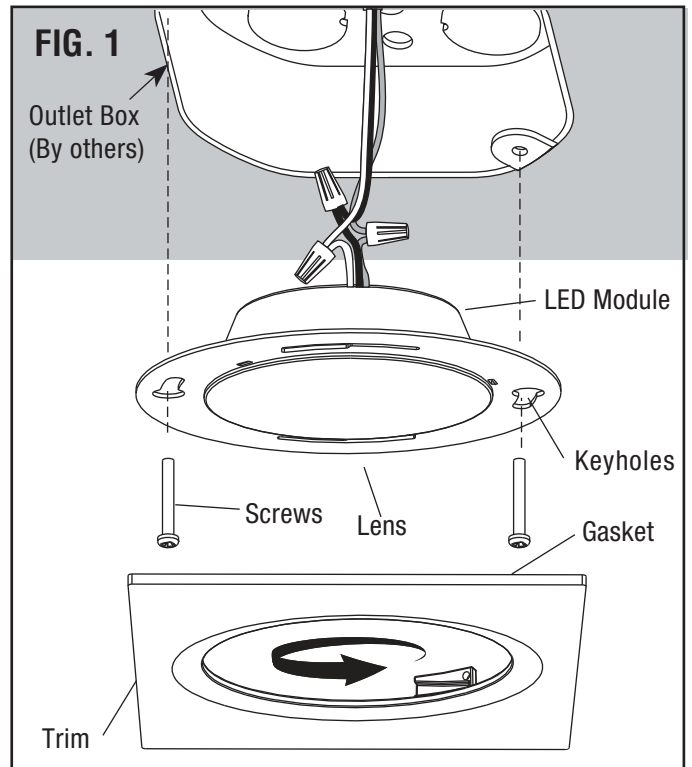

**NOTE :** For wet locations, Place gasket on back of trim and Ensure gasket aligns with outer diameter of junction box.