


8709
120V

Catalog #:		Type
Project:		Date
Prepared by:		

4" LED Square Retrofit Downlight

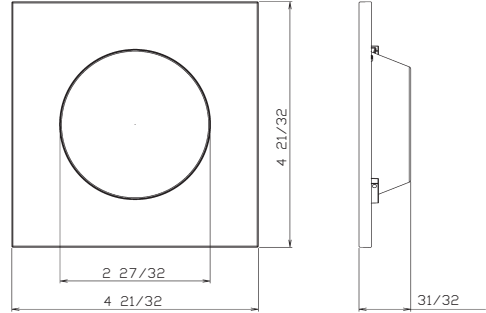

DESCRIPTION

A slim profile, small aperture downlight that fits in a 4" octagonal j-box. Wet location listing, IC rating, and wide distribution makes this an excellent choice for simple illumination in hallway and bathroom applications.

DESIGN FEATURES

Construction

- Durable aluminum construction
- Polycarbonate frosted lens


Electrical

- 120V-60Hz
- Dimmable TRIAC or ELV, 10-100%
- 50,000 hour projected life
- 90 CRI | 11W | 691 lms (delivered)
- 3000K or 4000K
- Beam Angle: 110°
- Operating temperature: 14°F - 104°F

Installation

- Simple and easy installation - light engine and trim connects via twist and lock
- Installs in 4" Octagonal ceiling j-box (min 2" depth);

j-box supplied by others

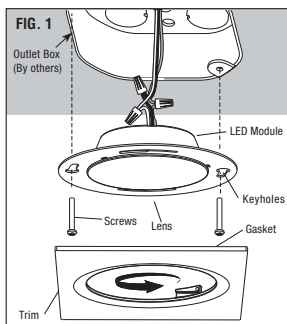

Dimensions

- 4-21/32" x 4-21/32" x 31/32"

Certifications

- cCSAus Listed for wet location
- IC Rated
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: 8709WH-90-3K

Model #	Finish	CRI	CCT
8709	WH	-90	
8709	WH : White	-90 : 90 CRI	-3K : 3000K -4K : 4000K

For Round Trim, refer to 8708 Specification Sheet

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



12/29/21

RP LIGHTING • FANS