

REFLEX GLASS

VESSEL SINK ALL MODELS

YOUR GLASS VESSEL SINK

All vessel sinks do not have an overflow and may require a specific type of drain such as a pop-up, twist and turn, or a grid drain assembly. Please check your local plumbing codes to determine which drain will meet local plumbing code standards for this product.

BEFORE YOU BEGIN

- · Observe all plumbing and building codes..
- Follow these instructions only if it apply to your installation. Vessel sinks allow you to be creative and flexible with your installation.
- Before installation, remove your new glass sink and carefully inspect it for damage. Return the glass sink to its packaging until you
 are ready to install it.
- · These instructions contain important care and cleaning instructions. Please review these instructions carefully.

SUGGESTED TOOLS AND MATERIALS










Adjustable Wrench

Channel Lock

Tape Measure

Safety Glasses

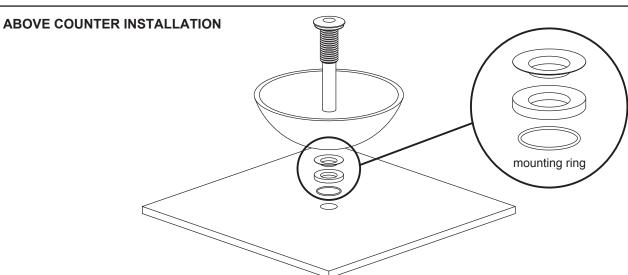

STEP 1:

Cut out a 1 3/4" hole on the counter-top for the drain. Please refer to the cutout template.

STEP 2:

Carefully, position the sink in the cutout opening. If you have mounting ring, place the mounting ring on the counter-top before positioning the sink.

STEP 3:

Use moderate force and hand-tighten the drain kit to the sink to secure it on the counter-top. It may be necessary to cut part of the tail-piece or part of the horizontal leg in order to make fit to existing plumbing.



CAUTION! Do not over tighten the drain assembly as this may cause the bowl to forcefully crack during installation or at some time in the future.

CARE AND CLEANING

- Never use a strong / abrasive cleaner. Always test your cleaning solution on an unnoticeable area before applying it to the
 entire surface.
- · Wipe surfaces clean, immediately after applying cleaner.
- · Do not allow the cleaner to sit or soak. Never let cleaners sit on the surface of the lavatory.
- Use a soft, dampened sponge or cloth. Never use an abrasive material such as a brush or scouring pad to clean surfaces.
 They will scratch the lavatory surface.
- Always rinse and wipe clean the fixtures to prevent soap buildup.

09.2014



REFLEX GLASS

VESSEL SINK ALL MODELS

To print to actual scale, on printer settings change **PAGE SCALING to **NONE**



