




## ASSEMBLY INSTRUCTIONS

ITEM NO.: 3-8040-4

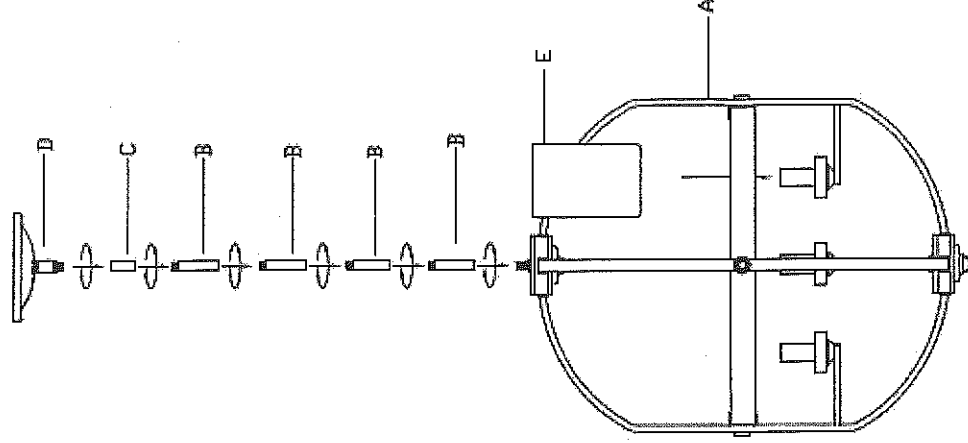

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point OFF.
3. Unravel the supply power and ground wires and pass them through the center holes of center tube (B), (C) and canopy assembly (D).
4. Thread the bottom of center tube (B) onto the protruding nipple at top of fixture body (A). Repeat the process for remaining center tube (C) as shown in the diagram, until snug.
5. Install the canopy assembly (D) onto the top of center tube (C).
6. Place the glass shade (E) setting inside the shade holder of fixture body (A).
7. Referring to the installation instruction with the product for the wiring and installation.
8. Install proper bulbs (not provided) to the sockets referring to the marking and/or labels on the fixture for maximum wattage.
9. Restore the power to the installation point ON.
10. Assembly is completely. Retain this sheet for future reference.

## INSTALLATION INSTRUCTION For Safety Cable Installation

### In INSTRUCTION:

This fixture is provided with a Safety Cable. The Safety Cable provides a back up system for the fixture's frame and the installation hardware. It is essential that the Safety Cable be properly installed. The Cable must be secured to a **STRUCTURAL MEMBER** of the building, and not to the outlet box. The Cable must be terminated with **SLEEVE** specifically sized for the Cable per the following steps:

1. Insert enough cable through one side of the sleeve to form a large loop,
2. Wrap the Cable around the Structural Member or Top Chain Link;
3. turn back the cut end and inserting into opposite side of sleeve. Use two sleeves if desired.
4. Pull back on cable until desired loop size is obtained. It is recommended to use thimble in loop.
5. Allow 1/8" of cable cut end to extend beyond end of sleeve. Make sure this does not slip back into sleeve while swaging.

*Please refer to the below Fig.1 & Fig.2 for the detail information!*

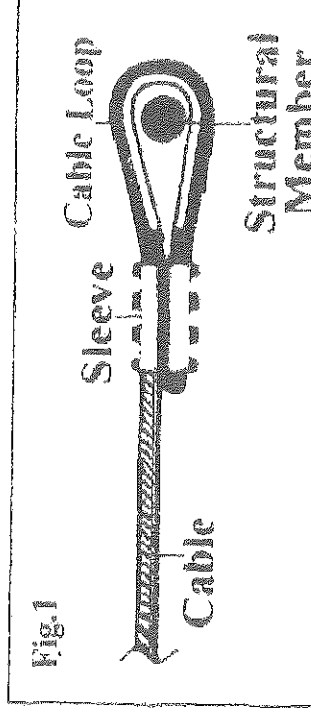


Fig.1

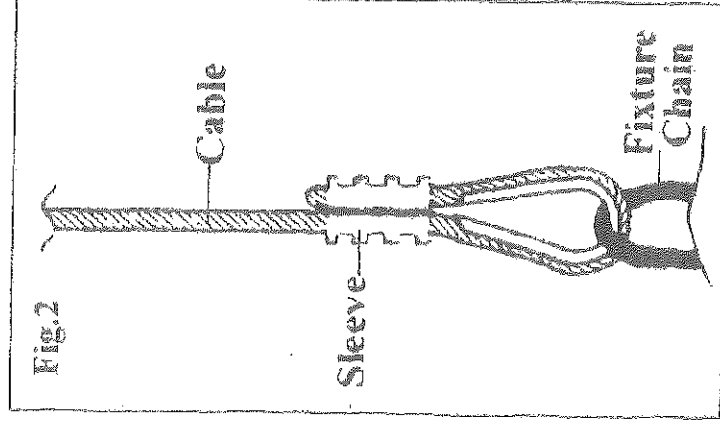


Fig.2

Safety Cable must be mounted on the chandelier **TOP**  
**CHAIN LINKS.**

This is a sketch for only Safety Cable mounting, to **CHAIN.** The Cable must be secured to a **STRUCTURAL MEMBER** of the building, and not to the outlet box.

**\*\*Remark: Pls make sure all hardware is properly tightened and that the cable is positioned clear of any obstructions! \*\***