

1-305-6

1-306-8



INSTALLATION INSTRUCTION

For Safety Cable Installation


INSTRUCTION:

This fixture is provided with a Safety Cable. The Safety Cable provides a back up system for the fixture's frame and the installation hardware. It is essential that the Safety Cable be properly installed. The Cable must be secured to a **STRUCTURAL MEMBER** of the building, and not to the outlet box. The Cable must be terminated with **SLEEVE** specifically sized for the Cable per the following steps:

1. Insert enough cable through one side of the sleeve to form a large loop,
2. Wrap the Cable around the Structural Member or Top Chain Link;
3. turn back the cut end and inserting into opposite side of sleeve. Use two sleeves if desired.
4. Pull back on cable until desired loop size is obtained. It is recommended to use thimble in loop.
5. Allow 1/8" of cable cut end to extend beyond end of sleeve. Make sure this does not slip back into sleeve while swaging.

Please refer to the below Fig.1 & Fig.2 for the detail information!


Fig.1

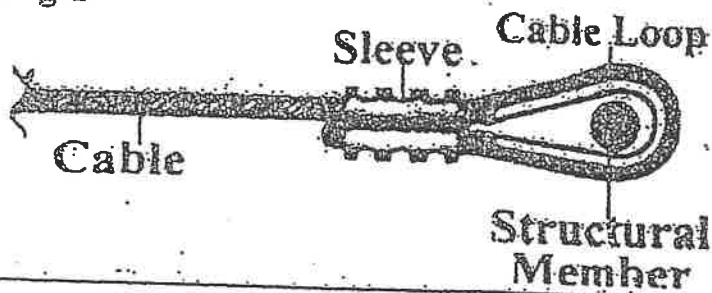

Safety Cable must be mounted on the chandelier **TOP CHAIN LINKS**.

This is a sketch for only Safety Cable mounting, to **CHAIN**. The Cable must be secured to a **STRUCTURAL MEMBER** of the building, and not to the outlet box.

Fig.2

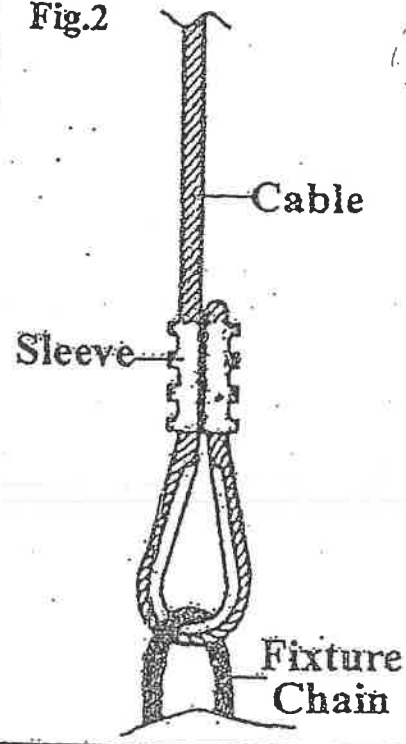

****Remark:** Pls make sure all hardware is properly tightened and that the cable is positioned clear of any obstructions!**