


ASSEMBLY INSTRUCTIONS

ITEM NO.: 1-2111-6-13

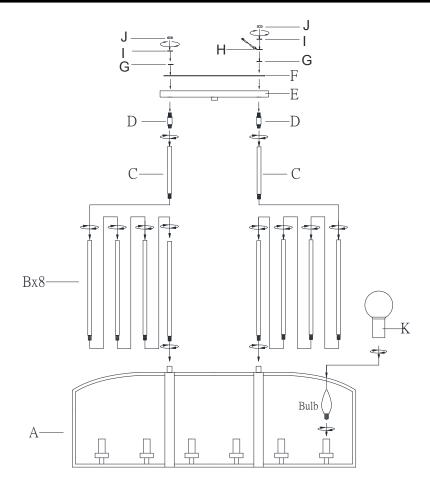

 $\mathsf{B} \to \mathsf{A} \to \mathsf{C} \to \mathsf{D} \to \mathsf{E} \to \mathsf{F} \to \mathsf{G} \to \mathsf{H} \to \mathsf{I} \to \mathsf{J} \to \mathsf{BULB} \to \mathsf{K}$

- 1. Carefully unpack and identify all parts referring to illustration for parts identification.
- 2. Turn the power to the installation point OFF.
- Unravel the supply power and ground wires and pass them through the center holes of center tube (B), (C), swivel (D), canopy (E), strip plate (F), lock washer (G), safety cable (H), lock washer (I) and hex nut (J).
- 4. Thread the bottom of center tube (B) onto the fixture body (A). Repeat the process for remaining center tube (B), (C) as shown in the diagram, until snug.
- 5. Install the swivel (D) onto the top of center tube (C).
- 6. Place the canopy (E), strip plate (F) and lock washer (G), safety cable (H) and lock washer (I) over the swivel (D), secure with the hex nut (J).
- 7. Referring to the installation instruction with the product for the wiring and installation.
- 8. Install proper bulbs (not provided) to the sockets referring to the marking and/or labels on the fixture for maximum wattage.
- 9. Place the glass shade (K) over the bulb and fix with the cup on fixture body (A). Do not over tighten.
- 10. Restore the power to the installation point ON.
- 11. Assembly is completely. Retain this sheet for future reference.