




ASSEMBLY INSTRUCTIONS

ITEM NO.: 1-2350-8

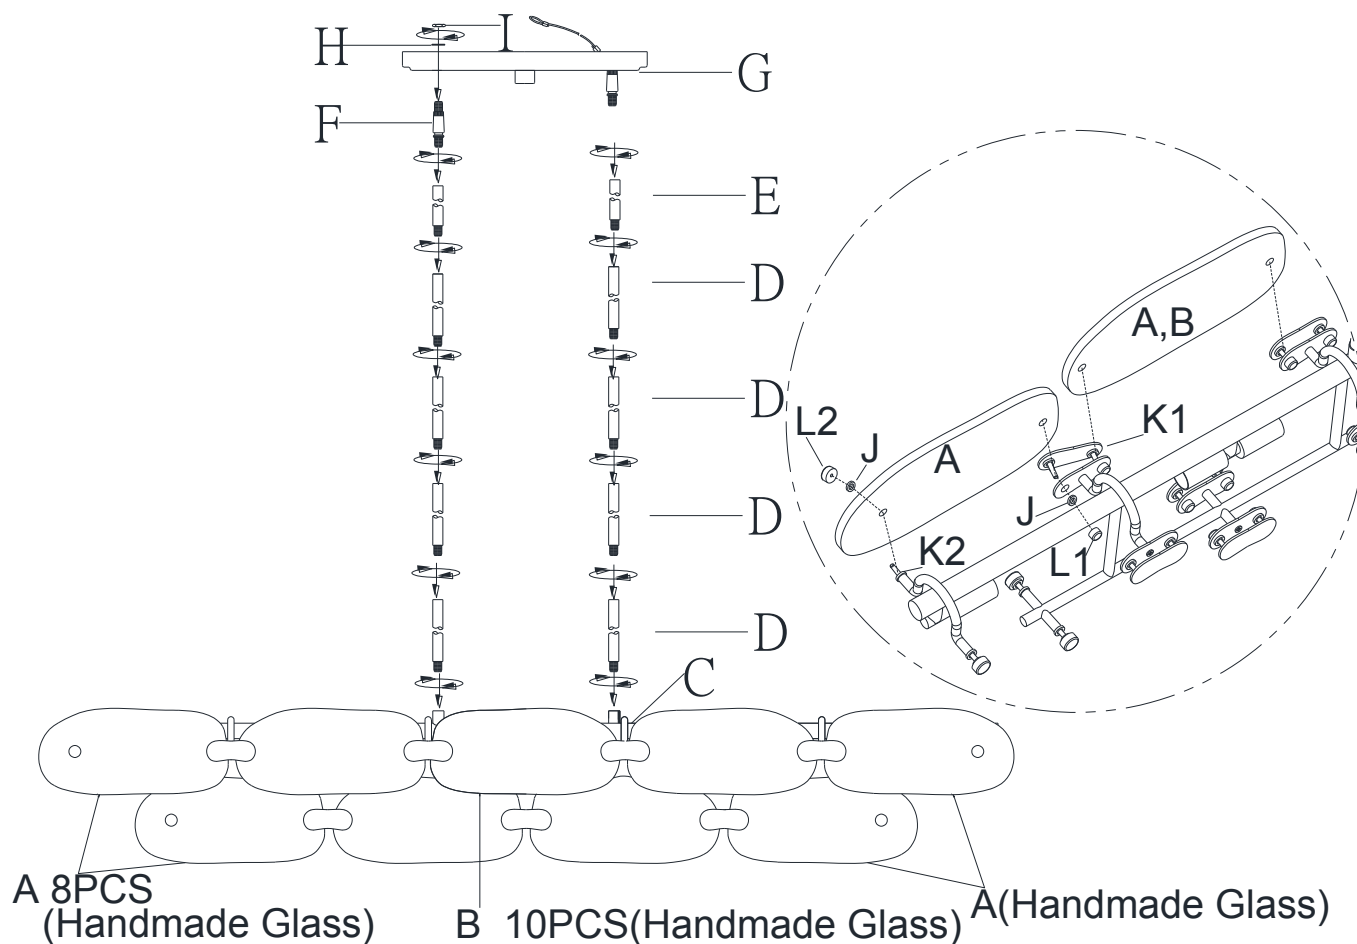

C → D → E → F → G → H → I → A → B → J → K1&K2 → L1&L2

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point **OFF**.
3. Unravel the supply power and ground wires and pass them through the center holes of center tube (D), (E) and canopy assembly (G).
4. Thread the bottom of center tube (D) to the fixture body (C). Repeat process for remaining center tube (D) and (E). Hands tighten until snug.
5. Install the swivel (F) onto the top of center tube (E).
6. Place the canopy assembly (G) and lock washer (H) over the swivel (F), secure with the hex nut (I).
7. Unscrew finial (L1), place one hole of glass (A) and rubber washer (J) into the nipple of the decorative steel (K1), fix with finial (L1) (DO NOT TIGHTEN). Then unscrew finial (L2), place the other hole of glass (A) and rubber washer (J) into the nipple (K2) of the fixture body, fix with finial (L2) (DO NOT TIGHTEN).
8. Repeat same process on all A&B glasses, tighten all finials after all glasses assembled.
9. Install proper bulbs (G9 included) to each socket referring to the markings and / or labels on the fixture for maximum wattage.
10. Referring to the installation instruction with the product for the wiring and installation.
11. Retain power to the installation point ON and retain this sheet for future reference.