




ASSEMBLY INSTRUCTIONS

ITEM NO.: 3-9852-4-67

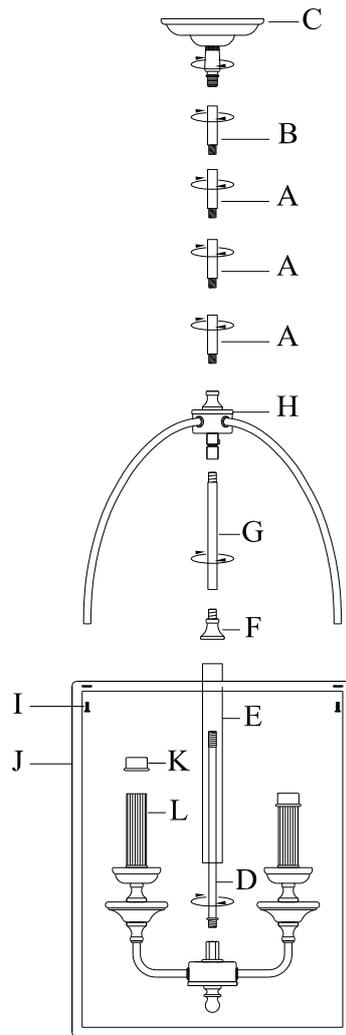

D→E→F→G→H→ A → B → C→I→J→K→L

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point OFF.
3. Screw the center tube (D) through the plum blossom tube (E) onto the protruding teat on the top of the clamp body. Screw the wheel (F) and center tube (G) onto the center tube (D) as shown, until it fits snugly.
4. Unravel the supply power and ground wires and pass them through the center holes of Light stand (H) and center tube (A), (B) and canopy assembly (C).
5. Screw the center tube (G) onto the lamp holder (H) and screw the bottom of the center tube (A) onto the holder (H). Repeat the process for the remaining center tube (A) as shown in the illustration. The canopy assembly (C) is tightly mounted to the top of the center tube (B).
6. Thread the screw (I) through the square frame (J) and tighten it to the lamp bracket (H) .
7. Put sleeve cap (K) on the casing(L).
8. Install proper bulbs (not provided) to the sockets referring to the marking and/or labels on the fixture for maximum wattage.
9. Restore the power to the installation point ON.
10. Assembly is completely. Retain this sheet for future reference.