



# CS 210/RS 210 Series Interconnected Lock

## Introducing the Schlage Interconnected lock.

The new Schlage CS and RS 210 Interconnected Locks combine exclusive options with increased strength, for both residential and commercial applications. The Schlage CS and RS 210 feature single motion egress to meet Life and Safety code requirements, as well as adjustability from the standard 4" to 5-1/2" door preps. Robust performance exceeds BHMA grade 2 requirements, giving the CS and RS 210 the combination of aesthetics, versatility and strength.

### Features and Benefits

#### Reliable:

- Meets all ANSI/BHMA A156.25 Grade 2 requirements
- 3 hr. UL fire rating

#### Field Configurable:

- Works with door prep of 4" or 5-1/2"

#### Adaptable:

- 15 Levers styles
- 2 Escutcheon styles
- 6 Finishes

#### Flexible:


- FE210: Electronic Deadbolt
- RS210: B60 Trim
- CS210: B500 Trim
  - ↳ SFIC and FSIC



## Lever Styles



## Escutcheon Styles

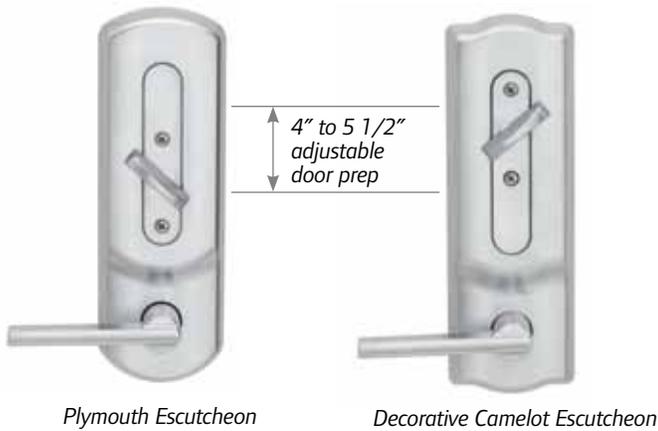

## Specifications

- ANSI/BHMA Grade 2 certified
- **UL Rating** – UL 3hr. rating is standard
- **Latch** – UL latch comes with 1" x 2-1/4" square and round corner faceplate (square corner standard, round corner included in package). 1" edge bore required.
- **Strikes** – 1-1/8" x 2-3/4" square corner deadbolt strikes and 2-1/4" x 1-5/8" square corner full lip latch strike reinforcer. Dust box not included.
- **Backset** – Adjustable backset, fits 2-3/8" or 2-3/4" backsets
- **Levers** – All lever trim is non-handed and field reversible
- **Stile width** – Minimum 4-1/2" for 2-3/8" backset, minimum 5" stile for 2-3/4". To ensure proper fit, use the dimensions below
- **Return to Door** – Saturn (SAT) and Neptune (NEP) levers are return to door code compliant
- **Cylinder** –  
 FE & RS Series  
 Standard: 6 pin solid brass, keyed 5-pin  
 CS Series  
 Standard: 6 pin solid brass, keyed 5-pin, C123 keyway  
 Optional: FSIC (full size interchangeable core), SFIC (small format interchangeable core)
- **Keys** – (2) Silver nickel keys included
- **Door Range** – 1-3/8" to 1-3/4" standard. 1-3/4" to 2" optional. Must be specified
- **Center to Center** – Fits 4" or 5-1/2" center to center door preps.
- **\*Credential** – Deadbolt is operated using iButton credential (sold separately)  
 \*Note: Only available on the FE200.

## Deadbolt Choices

- 3 styles - (2) for mechanical security (1) for electronic

### Mechanical



CS200

RS200

### Electronic



FE200

## Cylinder Choices – available for CS 200 Series only

- 3 options - standard, full size or small format interchangeable core



Full Size Interchangeable Core



Small Format Interchangeable Core

## Finishes



605  
Bright Brass

609  
Antique Brass

619  
Satin Nickel

625  
Bright Chrome

626  
Satin Chrome

716/643e  
Aged Bronze

