

DRC033 - 30 lb Gourmet Clear Ice Machine

Legacy Under-Counter Gourmet Ice Machine



Features

- 15" cabinet width
- Produces up to 30 lbs. of gourmet ice in 24 hours
- Maintains ideal bin capacity with automatic shut-off and restart
- Accepts custom wood panels to match your decor
- Aluminum door with brushed stainless steel finish and matching exposed door frame
- Available with built-in drain pump
- Available in stainless steel finish only
- Field reversible door
- Stainless wrap-around door with towel bar handle available as an accessory (KSS model)

INDOOR ONLY

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
30 / 13.6	16 / 7.2	26 / 12

- Units installed in regions of extreme weather conditions may not reach production capacities.
- Units installed in elevations greater than 6,000 feet or 1,800 meters above sea level require an altitude adjustment to maintain proper ice level.



Gourmet Clear Ice




Gourmet Cube
1" x 1 1/8" x 1 1/4"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for beverages.

Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

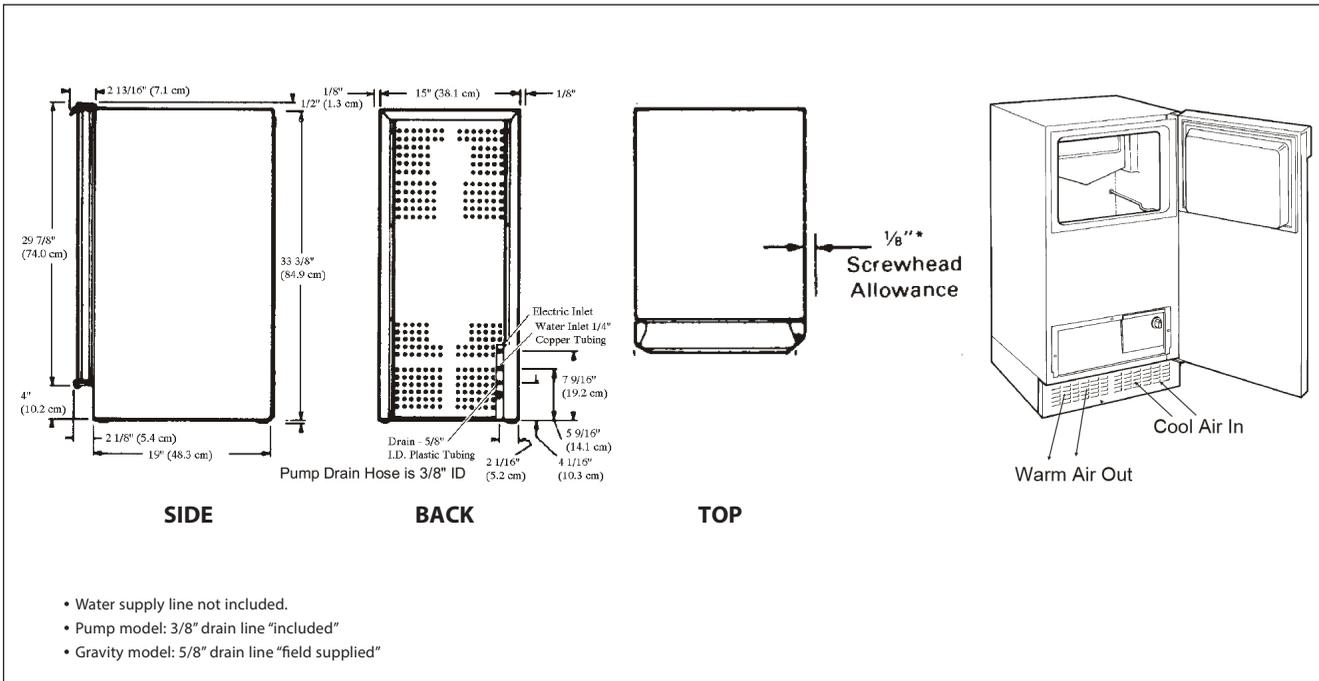

- Water supply line not included.
- Pump model: 3/8" drain line "included"
- Gravity model: 5/8" drain line "field supplied"

All Models

24 Hour Ice Production:
 (70° Air/50° Water) 30 lb / 13.6 kg
 (90° Air/70° Water) 16 lb / 7.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: 15a dedicated circuit required
 (Volts/Hz/Phase) 115/60/1

Amps: 3.6

Maximum Fuse Size: 15


Refrigerant: R290

Dimensions (W x D x H):
 Unit (without legs adjusted):
 15" x 22.8125" x 33.875"
 (38.1 x 57.94 x 86.04 cm)

Shipping Carton: 18" x 28" x 38"
 (45.7 x 71.1 x 96.5 cm)

Specifications

	Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
Indoor	DRC033GA-1SSD	Stainless Steel / Aluminum	Gravity	83 / 38
	DRC033PA-1SSD	Stainless Steel / Aluminum	Pump	88 / 40

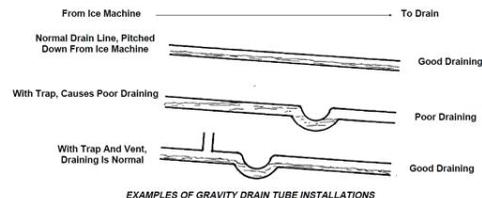

DRC033G: Gravity flow drain tube
 DRC033P: Built-in pump to expel drain water which includes 10' drain tube

EXAMPLES OF GRAVITY DRAIN TUBE INSTALLATIONS

Accessories

Model	Description	Shipping Weight lb / kg
KHAND	Custom Handle Trim Piece (Top)	1 / 0.45
KSS	Wrap Around Stainless Steel Door Sleeve Kit	12 / 5.5
SS-33	Stainless Steel Front Panel Kit	9/4
19-0653	Clear One Concentrated Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	90°F (38°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.