



600 Rye



200 Oat



700 Barley



500 Malt



750 Wheat

Style Number	199TS
Construction	glazed porcelain
Tile Type	floor tile
Tile Size	6" x 36"
Technical	
Wear Rating Group	Multiple*
Break Strength	> 425
Water Absorption %	< 0.5
Pre-consumer Recycled Content	40%
DCOF	> 0.42
Shade Variation	V3
Installation Area	Floors, Walls, Exteriors

* color 200 - 4; all other colors - 3. Wear rating 3 not suggested for exterior floor applications.

A DCOF value of >0.42 is the new standard for tiles specified for commercial application in standard A1371-2012, Section 9.6. It replaces the SCOF value of >0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com


MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A1371 section 6.2.2.110, available at www.tcnatile.com/sections6.2.2.110.html.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A1371 standards.

Colors




200 Oat

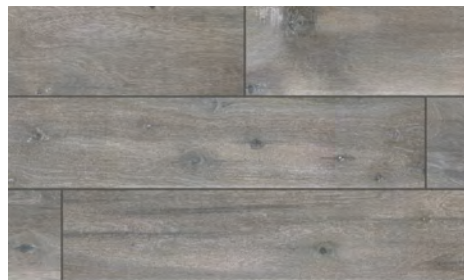

500 Malt*



600 Rye*

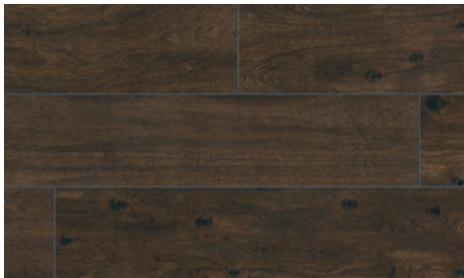

700 Barley*



750 Wheat*

