

TILE & STONE

MAXIMUS
porcelain | ceramic



150 Carrara



170 Calacatta

Style Number	CS16M	CS15M	CS14M	CS17M	CS19M	CS18M
Construction	porcelain	porcelain	porcelain	ceramic	porcelain	porcelain
Tile Type	floor tile	floor tile	floor tile	wall tile	bullnose	mosaic
Tile Size	12" x 24"	18" x 18"	12" x 12"	3" x 6"	2.75" x 12"	12" x 12" x 2"

Technical

Wear Rating Group	4	4	4	N/A	4	4
Break Strength	> 300	> 300	> 300	> 300	N/A	N/A
Water Absorption %	< 0.50	< 0.50	< 0.50	7	< 0.50	< 0.50
DCOF	> 0.42	> 0.42	> 0.42	N/A	> 0.42	> 0.42
Shade Variation	V2	V2	V2	V2	V2	V2
Installation Area	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Walls	Floors, Walls, Exteriors	Floors, Walls, Exteriors

A DCOF value of >0.42 is the new standard for tiles specified for commercial application in standard A1371-2012, Section 9.6. It replaces the SCOF value of >0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com


MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A1371 section 6.2.2.110, available at www.tcnatile.com/sections6.2.2.110.html.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A1371 standards.

Colors




150 Carrara

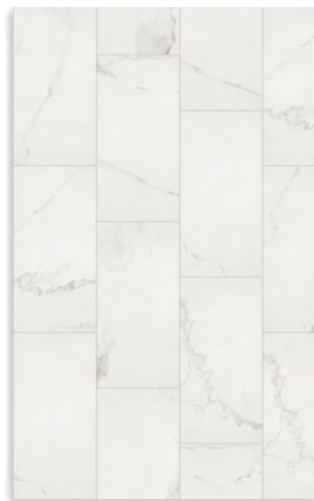

170 Calacatta

CS17M wall




150 Carrara



170 Calacatta

CS18M mosaic



150 Carrara



170 Calacatta

