

TILE & STONE

BASIS
porcelain



190 Zinc



590 Carbon



560 Lithium



180 Earth

Style Number	CS21W	CS20W	CS23W	CS22W
Construction	porcelain	porcelain	porcelain	porcelain
Tile Type	floor tile	floor tile	bullnose	basketweave mosaic
Tile Size	16" x 32"	12" x 24"	2.75" x 12"	12" x 12" x 2"
Technical				
Wear Rating Group	4	4	4	4
Break Strength	> 350	> 350	> 350	> 350
Water Absorption %	< 0.5	< 0.5	< 0.5	< 0.5
DCOF	> 0.5	> 0.5	> 0.5	> 0.5
Shade Variation	V3	V3	V3	V3
Installation Area	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors

A DCOF value of >0.42 is the new standard for tiles specified for commercial application in standard A1371-2012, Section 9.6. It replaces the SCOF value of >0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com

MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tcnatile.com/sections6.2.2.1.10.html.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Colors




180 Earth



190 Zinc



560 Lithium

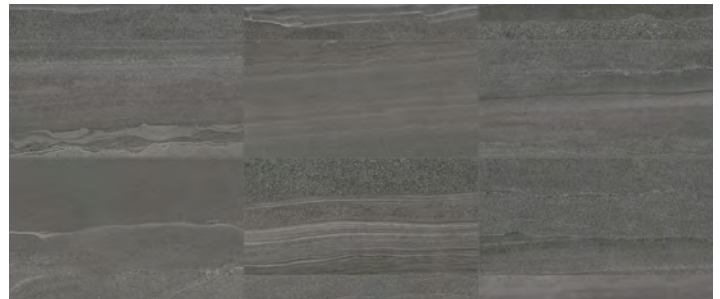

590 Carbon

