



100 Ivory



500 Grey



700 Brown

Style Number	CS38P	CS37P	CS36P	CS39P	CS40P
<b>Construction</b>	porcelain	porcelain	porcelain	porcelain	porcelain
<b>Tile Type</b>	floor tile	floor tile	floor tile	bullnose	mosaic
<b>Tile Size</b>	12" × 24"	18" × 18"	13" × 13"	2.75" × 13"	13" × 13"

## Technical


<b>Wear Rating Group</b>	4	4	4	4	4
<b>Break Strength</b>	337	337	292	292	292
<b>Water Absorption %</b>	0.3	0.3	0.3	0.3	0.3
<b>DCOF</b>	0.56	0.56	0.56	0.56	0.56
<b>Shade Variation</b>	V2	V2	V2	V2	V2
<b>Installation Area</b>	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors

A DCOF value of >0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of >0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: [www.tcnatile.com](http://www.tcnatile.com)


### MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at [www.tcnatile.com/sections6.2.2.1.10.html](http://www.tcnatile.com/sections6.2.2.1.10.html).
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.


## Colors

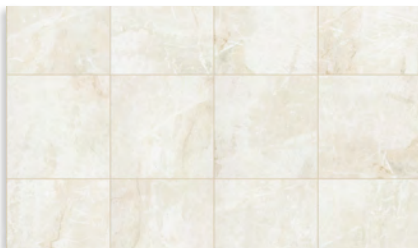

100 Ivory

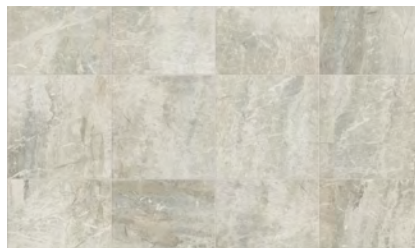

500 Grey

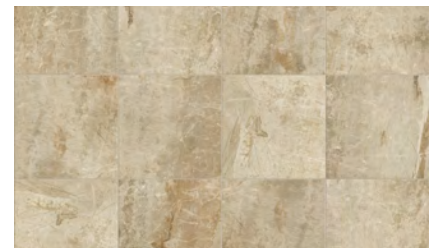

700 Brown

### CS40P 13" × 13" Mosaic



100 Ivory



500 Grey



700 Brown

