

TILE & STONE

VISIONARY
porcelain



501 Oasis



120 Retreat



250 Haven



550 Refuge

Style Number	CS64Z*	CS62Z	CS97H	CS98H	CS99H
Construction	porcelain	porcelain	porcelain	porcelain	porcelain
Tile Type	floor tile	floor tile	floor tile	mosaic	bullnose
Tile Size	20" x 20"	13" x 13"	12" x 24"	12" x 12" 2" x 2"	3" x 12"

Technical

Wear Rating Group	4	4	4	4	4
Break Strength	≥ 350	≥ 350	≥ 350	≥ 350	≥ 350
Water Absorption %	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
DCOF	≥ 0.42	≥ 0.42	≥ 0.42	≥ 0.42	≥ 0.42
Shade Variation	V2	V2	V2	V2	V2
Installation Area	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors


*only available in colors Retreat and Haven

A DCOF value of >0.42 is the new standard for tiles specified for commercial application in standard A1371-2012, Section 9.6. It replaces the SCOF value of >0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com


MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tcnatile.com/sections6.2.2.1.10.html.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Colors

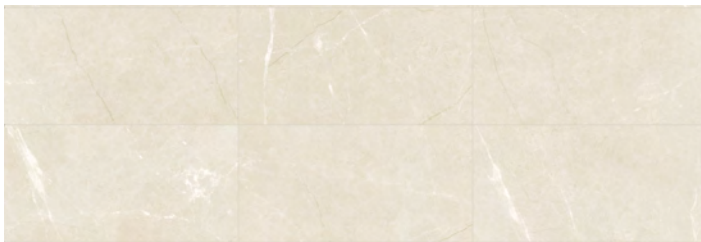

120 Retreat*

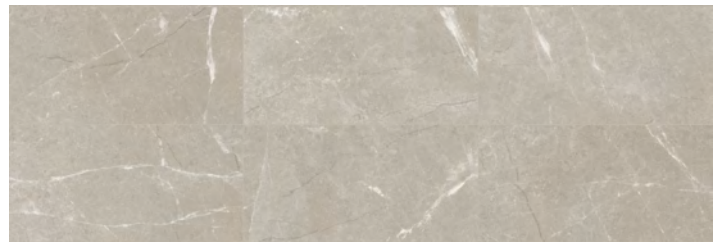

250 Haven*



501 Oasis



550 Refuge

