

TILE & STONE

TESSUTO
color body porcelain



512 Warm Blend



100 Bianco




200 Sabbia



125 Diamante



500 Grigio

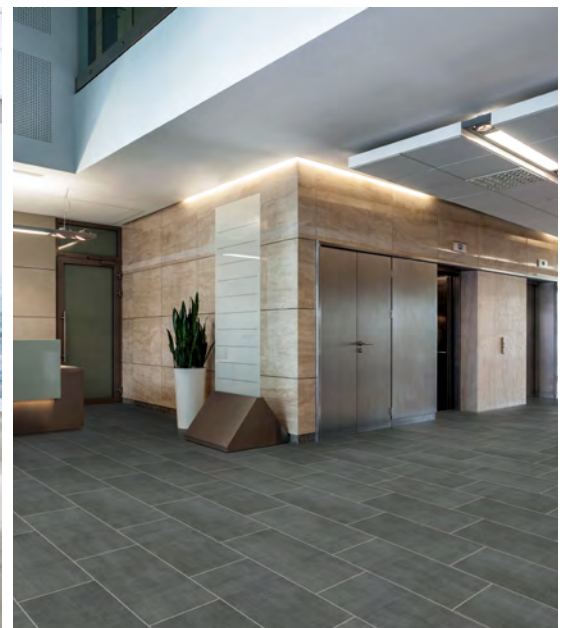

550 Fumo

Style Number	CS69V	CS73V	CS72V	CS70V	CS71V
Construction	color body porcelain	color body porcelain	color body porcelain	color body porcelain	color body porcelain
Tile Type	floor tile	bullnose	covebase	mosaic	stacked mosaic
Tile Size	12" x 24"	2.75" x 12"	6" x 12"	12" x 12" x 2"	12" x 12" x 1" x 6"

Technical

Wear Rating Group	Multiple*	Multiple*	Multiple*	Multiple*	4
Break Strength	> 350	NA	NA	> 350	> 350
Water Absorption %	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5
DCOF	> 0.42	NA	NA	> 0.42	> 0.42
Shade Variation	V1	V1	V1	V1	V1
Installation Area	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors


*color 550 - 3; color 100 - 5; other colors - 4. Wear rating 3 not suggested for exterior floor application.

A DCOF value of >0.42 is the new standard for tiles specified for commercial application in standard A1371-2012, Section 9.6. It replaces the SCOF value of >0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com


MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tcnatile.com/sections6.2.2.1.10.html.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.


Colors



**100 Bianco




125 Diamante



200 Sabbia



500 Grigio



*550 Fumo

CS71V stacked mosaic



215 Warm Blend

CS70V mosaic



**100 Bianco




125 Diamante



200 Sabbia



500 Grigio



*550 Fumo



512 Cool Blend



CLARITY
digital imaging



MADE IN THE USA

