

# TILE & STONE

**CURRENT**  
porcelain | ceramic



510 River Rush



Basketweave Mosaic | 125 White Water



152 Niagara Crush



125 White Water

Style Number	CS74Z	CS75Z	CS77Z	CS78Z	CS79Z	CS80Z
<b>Construction</b>	porcelain	porcelain	ceramic	ceramic	porcelain	porcelain
<b>Tile Type</b>	floor tile made in USA	floor tile made in USA	wall tile made in Italy	wall bullnose made in Italy	bullnose made in USA	mosaic made in USA
<b>Tile Size</b>	12" x 48"	12" x 24"	4" x 12"	4" x 12"	2.7" x 12"	12" x 12"
<b>Edges</b>	rectified	—	—	—	—	—
<b>Technical</b>						
<b>Wear Rating Group</b>	4	4	4	N/A	N/A	4
<b>Break Strength</b>	> 400	> 400	> 110	> 110	> 400	> 400
<b>Water Absorption %</b>	< 0.5	< 0.5	N/A	N/A	< 0.5	< 0.5
<b>Pre-consumer Recycled Content</b>	31%	31%	N/A	N/A	31%	31%
<b>Post-consumer Recycled Content</b>	9%	9%	N/A	N/A	9%	9%
<b>DCOF</b>	> 0.5	> 0.5	16	16	> 0.5	> 0.5
<b>Shade Variation</b>	V3	V3	V3	V3	V3	V3
<b>Installation Area</b>	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Walls	Walls	Floors, Walls, Exteriors	Floors, Walls, Exteriors

A DCOF value of >0.42 is the new standard for tiles specified for commercial application in standard A1371-2012, Section 9.6. It replaces the SCOF value of >0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: [www.tcnatile.com](http://www.tcnatile.com)

**MANUFACTURER'S WARNING:**

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A1371 section 6.2.2.1.10, available at [www.tcnatile.com/sections6.2.2.1.10.html](http://www.tcnatile.com/sections6.2.2.1.10.html).
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A1371 standards.

## Colors



125 White Water


**CS80Z** basketweave mosaic 12" x 12"




125 White Water



152 Niagara Crush



152 Niagara Crush

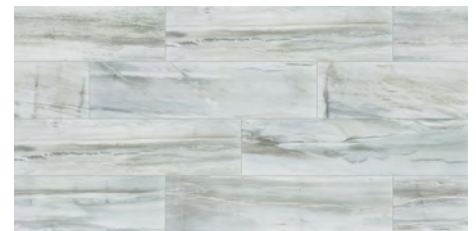

510 River Rush



510 River Rush

