


## **CORAL SPRINGS**

Engineered





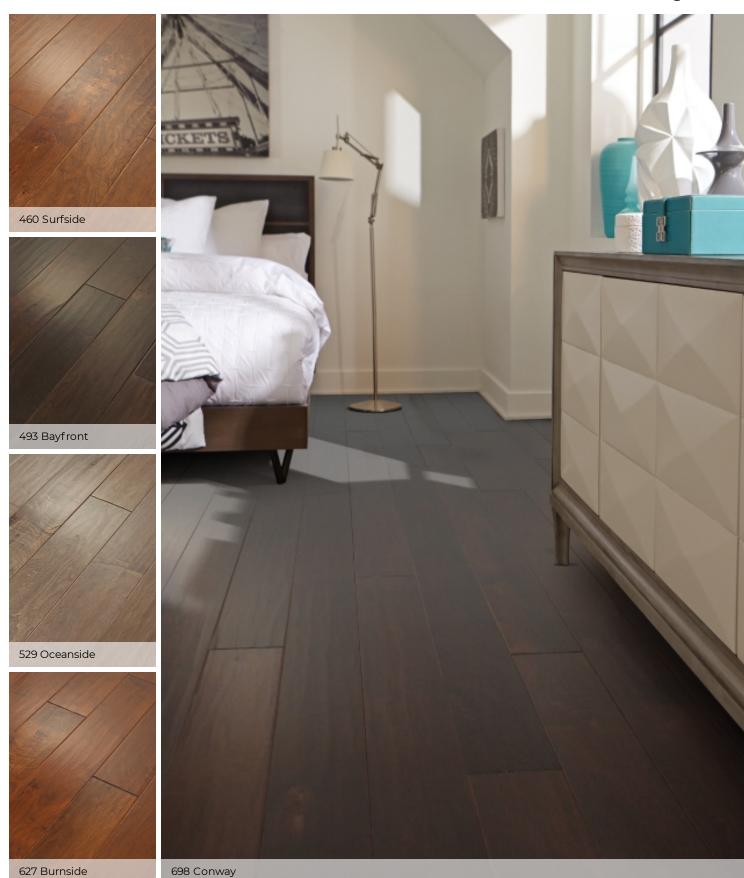

## **CORAL SPRINGS**



	US Units	Metric Units
Style Number	SW591	
Construction	Engineered	
Species	Maple	
Nominal Overall Thickness	3/8"	8.2 mm
Nominal Width	5"	127 mm
Finish	ScufResist Platinum	
Gloss Level	40%	
Surface Texture	Subtle Scraped	
Edge Description	Pillowed	
End Description	Pillowed	
Profile	Tongue And Groove	
Weight per Carton	33 lbs	14.96 kg
SQFT per Carton	23.66 sq ft	2.19 sq m
SQFT per Pallet	1419.6 sq ft	131.88 sq m
Installation Methods	Nail, Staple, Glue, Floating	
Installation Grade	Above, On, Below	
Variation	Moderate	
GREENGUARD® Certified	Yes	
Cradle-to-Cradle Certified	Yes	
Radiant Heat Approved	Yes	
Residential Warranty	Lifetime	
Commercial Warranty	5 Year Commercial	
All measurements are nominal.	Cartons may include random lengths.	

## **Features**

Subtle scraped maple flooring in bold, rich colors. Also available in a smooth surface version, Ocala.

**Trim Pieces** length: 78" (\*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are non-stocking - but are available through a quick-ship program. Delivery should take approximately 2 to 3 weeks.)









Flush Stairnose



SOSH8 SCH38
\*Overlap Stairnose Threshold / Carpet

Reducer



**TMH78** T-Molding



**QTR96**Quarter Round



