
## HARDWOOD

## **KEY WEST**

Engineered





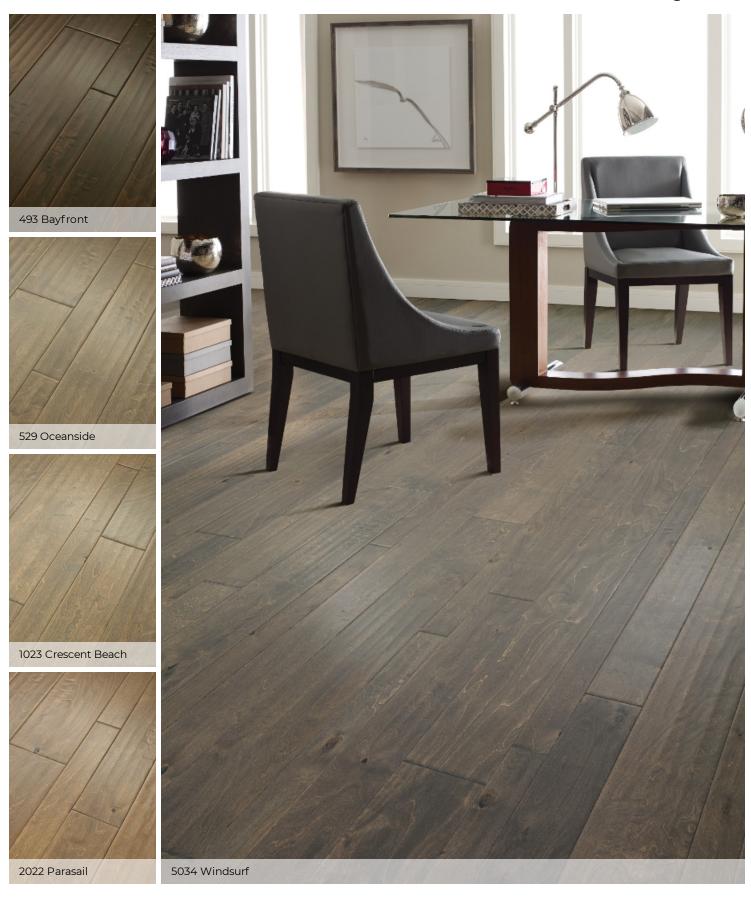

## **KEY WEST**

## HARDWOOD

	US Units	Metric Units
Style Number	SW664	
Construction	Engineered	
Species	Birch	
Nominal Overall Thickness	3/8"	9.5 mm
Nominal Width	Multiple	Multiple
Finish	UV Aluminum Oxide	
Gloss Level	20%	
Surface Texture	Subtle Scraped	
Edge Description	Micro Bevel	
End Description	Micro Bevel	
Profile	Tongue And Groove	
Weight per Carton	55.22 lbs	25.04 kg
SQFT per Carton	44.29 sq ft	4.11 sq m
SQFT per Pallet	1771.6 sq ft	164.58 sq m
Installation Methods	Nail, Staple, Glue, Floating	
Installation Grade	Above, On, Below	
Variation	Moderate	
GREENGUARD® Certified	Yes	
Cradle-to-Cradle Certified	Yes	
Radiant Heat Approved	Yes	
Residential Warranty	50 Years	
Commercial Warranty	5 Year Commercial	
All measurements are nominal.	Cartons may include random lengths.	

**Trim Pieces** length: 78" (\*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are nonstocking - but are available through a quick-ship program. Delivery should take approximately 2 to 3 weeks.)















SRH38 Flush Reducer

SORH8 \*Overlap Reducer

**SSH38** Flush Stairnose

SOSH8 \*Overlap Stairnose Threshold / Carpet

**SCH38** Reducer

**TMH78** T-Molding

QTR96 Quarter Round