


ECLECTIC OAK

Engineered





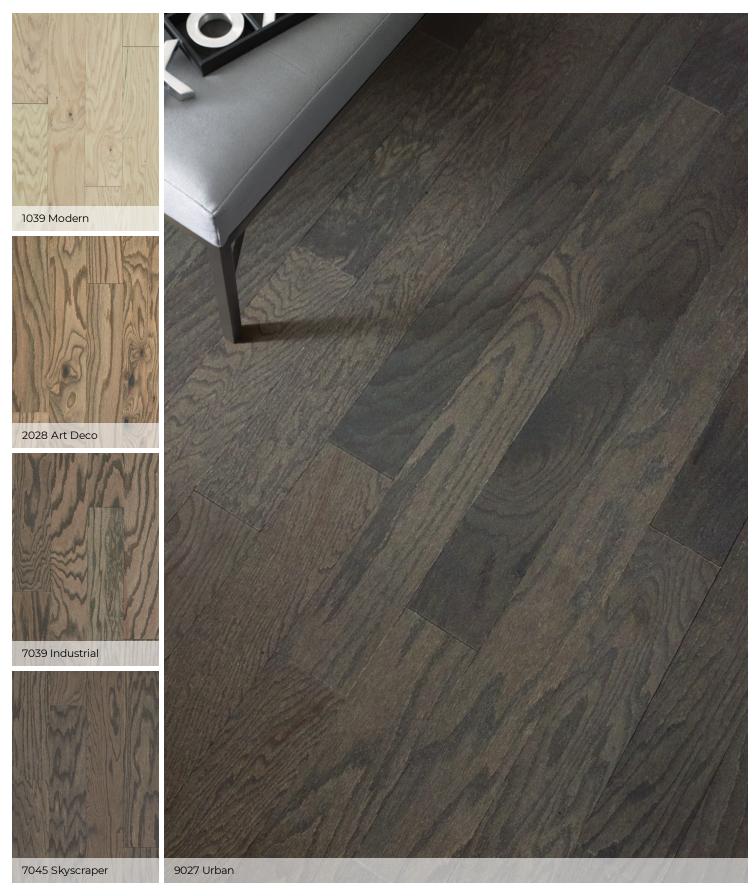

ECLECTIC OAK



	US Units	Metric Units
Style Number	SW696	
Construction	Engineered	
Species	Red Oak	
Nominal Overall Thickness	1/2"	11.81 mm
Nominal Width	4.94"	125.48 mm
Finish	ScufResist Platinum	
Gloss Level	7%	
Surface Texture	Smooth	
Edge Description	Micro Bevel	
End Description	Micro Bevel	
Profile	Tongue And Groove	
Weight per Carton	36 lbs	16.32 kg
SQFT per Carton	15.9 sq ft	1.47 sq m
SQFT per Pallet	954 sq ft	88.62 sq m
Installation Methods	Nail, Staple, Glue, Floating	
Installation Grade	Above, On, Below	
Variation	High	
GREENGUARD® Certified	Yes	
Radiant Heat Approved	Yes	
Residential Warranty	Lifetime	
Regional Availability	Not Available in Canada	
All measurements are nominal.	Cartons may include random lengths.	

Trim Pieces length: 78" (*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are nonstocking - but are available through a quick-ship program. Delivery should take approximately 2 to 3 weeks.)















SFR12 Flush Reducer

SRO12 *Overlap Reducer

SFS12

SSO12

SCR12 Flush Stairnose *Overlap Stairnose Threshold / Carpet Reducer

TMD78 T-Molding

QTR96 Quarter Round

