


SANCTUARY OAK

Engineered





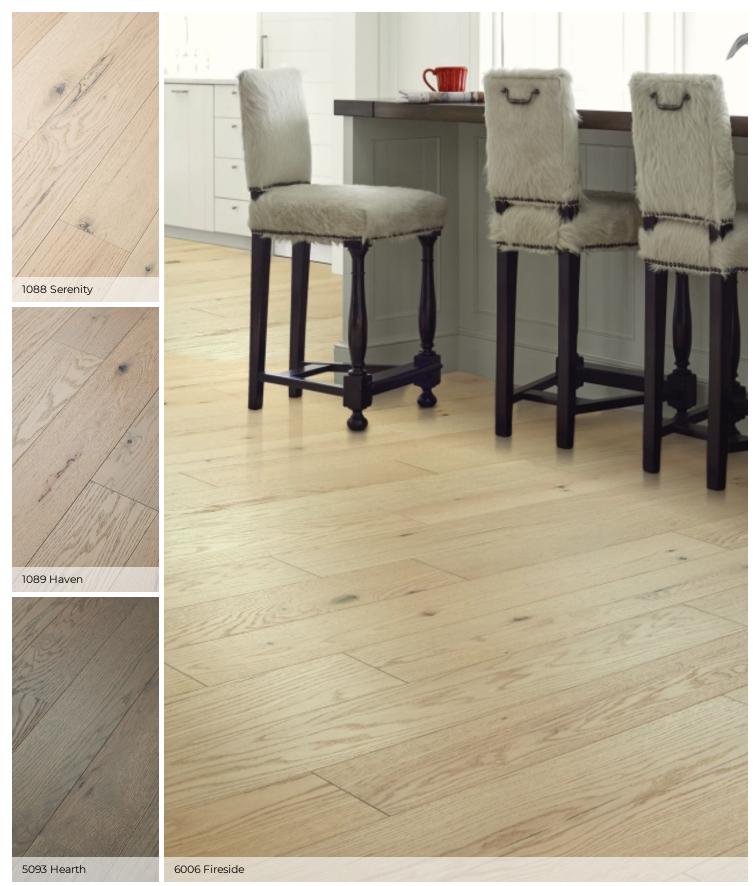

SANCTUARY OAK





Style Number SW714 Construction Engineered Species Oak Nominal Overall Thickness 1/2" 12 mm Nominal Width 638" 162.05 mm Finish Repel - Water Resist Closs Level 7%		US Units	Metric Units
SpeciesOakNominal Overall Thickness1/2"12 mmNominal Width6.38"162.05 mmFinishRepel - Water ResistGloss Level7%Surface TextureWirebrushedEdge DescriptionMicro BevelEnd DescriptionMicro BevelProfileTongue And GrooveWeight per Carton61 lbs27.66 kgSQFT per Carton25.4 sq ft2.35 sq mSQFT per Pallet990.6 sq ft92.02 sq mInstallation MethodsNail, Staple, Glue, FloatingInstallation GradeAbove, On, BelowVariationHighOrtho-Phthalates FreeYesRadiant Heat ApprovedYes	Style Number	SW714	
Nominal Overall Thickness 1/2" 12 mm Nominal Width 6.38" 162.05 mm Finish Repel - Water Resist Closs Level 7%	Construction	Engineered	
Nominal Width6.38"162.05 mmFinishRepel - Water ResistGloss Level7%Surface TextureWirebrushedEdge DescriptionMicro BevelEnd DescriptionMicro BevelProfileTongue And GrooveWeight per Carton61 lbs27.66 kgSQFT per Carton25.4 sq ft2.35 sq mSQFT per Pallet990.6 sq ft92.02 sq mInstallation MethodsNail, Staple, Glue, FloatingInstallation GradeAbove, On, BelowVariationHighOrtho-Phthalates FreeYesRadiant Heat ApprovedYes	Species	Oak	
Finish Repel - Water Resist Gloss Level 7% Surface Texture Wirebrushed Edge Description Micro Bevel End Description Micro Bevel Profile Tongue And Groove Weight per Carton 61 lbs 27.66 kg SQFT per Carton 25.4 sq ft 2.35 sq m SQFT per Pallet 990.6 sq ft 92.02 sq m Installation Methods Nail, Staple, Glue, Floating Installation Grade Above, On, Below Variation High Ortho-Phthalates Free Yes Radiant Heat Approved Yes	Nominal Overall Thickness	1/2"	12 mm
Gloss Level 7% Surface Texture Wirebrushed Edge Description Micro Bevel End Description Micro Bevel Profile Tongue And Groove Weight per Carton 61 lbs 27.66 kg SQFT per Carton 25.4 sq ft 2.35 sq m SQFT per Pallet 990.6 sq ft 92.02 sq m Installation Methods Nail, Staple, Glue, Floating Installation Grade Above, On, Below Variation High Ortho-Phthalates Free Yes Radiant Heat Approved	Nominal Width	6.38"	162.05 mm
Surface TextureWirebrushedEdge DescriptionMicro BevelEnd DescriptionMicro BevelProfileTongue And GrooveWeight per CartonG1 lbs27.66 kgSQFT per Carton25.4 sq ft2.35 sq mSQFT per Pallet990.6 sq ft92.02 sq mInstallation MethodsNail, Staple, Glue, FloatingInstallation GradeAbove, On, BelowVariationHighOrtho-Phthalates FreeYesRadiant Heat ApprovedYes	Finish	Repel - Water Resist	
Edge Description Micro Bevel End Description Micro Bevel Profile Tongue And Groove Weight per Carton 61 lbs 27.66 kg SQFT per Carton 25.4 sq ft 2.35 sq m SQFT per Pallet 990.6 sq ft 92.02 sq m Installation Methods Nail, Staple, Glue, Floating Installation Grade Above, On, Below Variation High Ortho-Phthalates Free Yes Radiant Heat Approved Yes	Gloss Level	7%	
End DescriptionMicro BevelProfileTongue And GrooveWeight per Carton61 lbs27.66 kgSQFT per Carton25.4 sq ft2.35 sq mSQFT per Pallet990.6 sq ft92.02 sq mInstallation MethodsNail, Staple, Glue, FloatingInstallation GradeAbove, On, BelowVariationHighOrtho-Phthalates FreeYesRadiant Heat ApprovedYes	Surface Texture	Wirebrushed	
ProfileTongue And GrooveWeight per Carton61 lbs27.66 kgSQFT per Carton25.4 sq ft2.35 sq mSQFT per Pallet990.6 sq ft92.02 sq mInstallation MethodsNail, Staple, Glue, FloatingInstallation GradeAbove, On, BelowVariationHighOrtho-Phthalates FreeYesRadiant Heat ApprovedYes	Edge Description	Micro Bevel	
Weight per Carton 61 lbs 27.66 kg SQFT per Carton 25.4 sq ft 2.35 sq m SQFT per Pallet 990.6 sq ft 92.02 sq m Installation Methods Nail, Staple, Glue, Floating Installation Grade Above, On, Below Variation High Ortho-Phthalates Free Yes Radiant Heat Approved Yes	End Description	Micro Bevel	
SQFT per Carton 25.4 sq ft 2.35 sq m SQFT per Pallet 990.6 sq ft 92.02 sq m Installation Methods Nail, Staple, Glue, Floating Installation Grade Above, On, Below Variation High Ortho-Phthalates Free Yes Radiant Heat Approved Yes	Profile	Tongue And Groove	
SQFT per Pallet 990.6 sq ft 92.02 sq m Installation Methods Nail, Staple, Glue, Floating Installation Grade Above, On, Below Variation High Ortho-Phthalates Free Yes Radiant Heat Approved Yes	Weight per Carton	61 lbs	27.66 kg
Installation MethodsNail, Staple, Glue, FloatingInstallation GradeAbove, On, BelowVariationHighOrtho-Phthalates FreeYesRadiant Heat ApprovedYes	SQFT per Carton	25.4 sq ft	2.35 sq m
Installation Grade Above, On, Below Variation High Ortho-Phthalates Free Yes Radiant Heat Approved Yes	SQFT per Pallet	990.6 sq ft	92.02 sq m
Variation High Ortho-Phthalates Free Yes Radiant Heat Approved Yes	Installation Methods	Nail, Staple, Glue, Floating	
Ortho-Phthalates Free Yes Radiant Heat Approved Yes	Installation Grade	Above, On, Below	
Radiant Heat Approved Yes	Variation	High	
	Ortho-Phthalates Free	Yes	
Residential Warranty Lifetime	Radiant Heat Approved	Yes	
	Residential Warranty	Lifetime	
Commercial Warranty 5 Year Commercial	Commercial Warranty	5 Year Commercial	
Regional Availability Not Available in Canada	Regional Availability	Not Available in Canada	
All measurements are nominal. Cartons may include random lengths.	All measurements are nominal.	Cartons may include random lengths.	

Trim Pieces length: 78" (*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are non-stocking - but are available through a quick-ship program. Delivery should take approximately 2 to 3 weeks.)



SRH12 Flush Reducer



SORH2

*Overlap Reducer

SSH12

Flush Stairnose



*Overlap Stairnose Threshold / Carpet

SOSH2

SCH12

Reducer

TMH78 T-Molding



QTR96Quarter Round



