
# Silva Valley 12





1 800.241.4692 | philadelphiacommercial.com

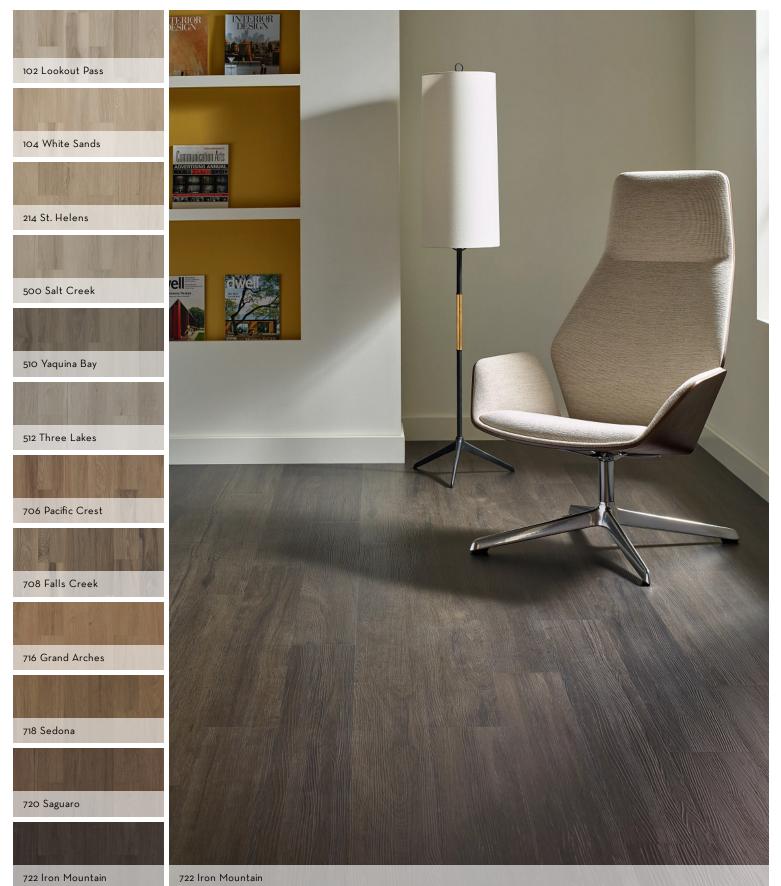

For reference purposes only if printed or downloaded.

## Silva Valley 12



Style Name Style Number Construction Class / ASTM F1700 Finish	Silva Valley 12 5610V High Performance Luxury Vinyl Tile Class III Printed Film Vinyl Tile ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	6 in w, 48 in l	15 cm w, 122 cm
Actual Dimensions	5.96 in w, 48 in l	15.14 cm w, 121.92 cm
Wear Layer Thickness	12 mil (0.012 in)	0.3 mm
Overall Thickness	0.098 in	2.5 mm
Installation	Direct Glue	
Recommended / Required Adhesive	Shaw 4100 or S150	


#### Packaging

Pieces per box21 pcsArea per box41.72 sq ftWeight per box35.44 lbs

3.88 sq m

16.08 kg

### Recommended Installation Method



#### Performance Testing

Resistance to Chemicals (ASTM F925)

Passes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

#### Warranties

#### 7 Year Commercial Limited

#### Environmental

Indoor Air Quality Recycled Content

#### FloorScore® Certified

Pre-consumer - 0%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.



1 800.241.4692 | philadelphiacommercial.com

