
Silva Valley 5.0





1 800.241.4692 | philadelphiacommercial.com

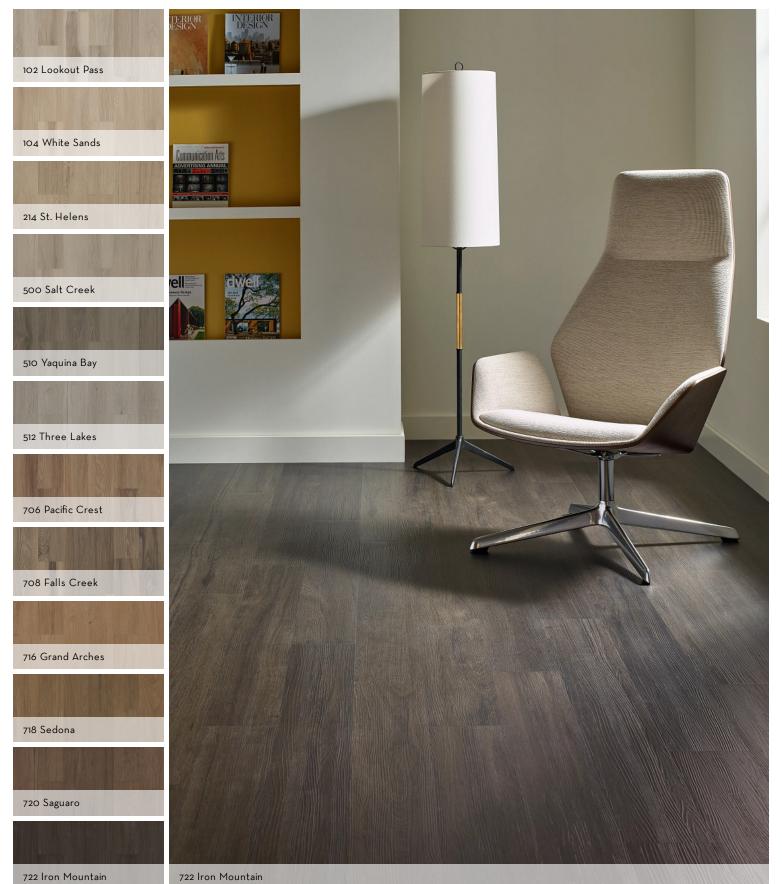

Silva Valley 5.0



Style Name Style Number Construction Class / ASTM F1700 Finish	Silva Valley 5.0 5612V High Performance Luxury Vinyl Tile Class III Printed Film Vinyl Tile, Type B (embossed) ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	6 in w, 48 in l	15 cm w, 122 cm
Actual Dimensions	5.96 in w, 48 in l	15.14 cm w, 121.92 cm
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Installation	Direct Glue	
Recommended / Required Adhesive	Shaw 4100 or S150	
Packaging		




Area per box Weight per box

2.03 sq m

16.84 kg



Recommended Installation Method



11 pcs

21.85 sq ft

37.13 lbs

Performance Testing

Passes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Resilient 15 Year Commercial Limited

Resistance to Chemicals (ASTM F925)

Environmental

Indoor Air Quality Recycled Content

FloorScore[®] Certified

Pre-consumer - 35%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.



1 800.241.4692 | philadelphiacommercial.com

