
TILE & STONE

RECLAIMED 8X40

glazed porcelain





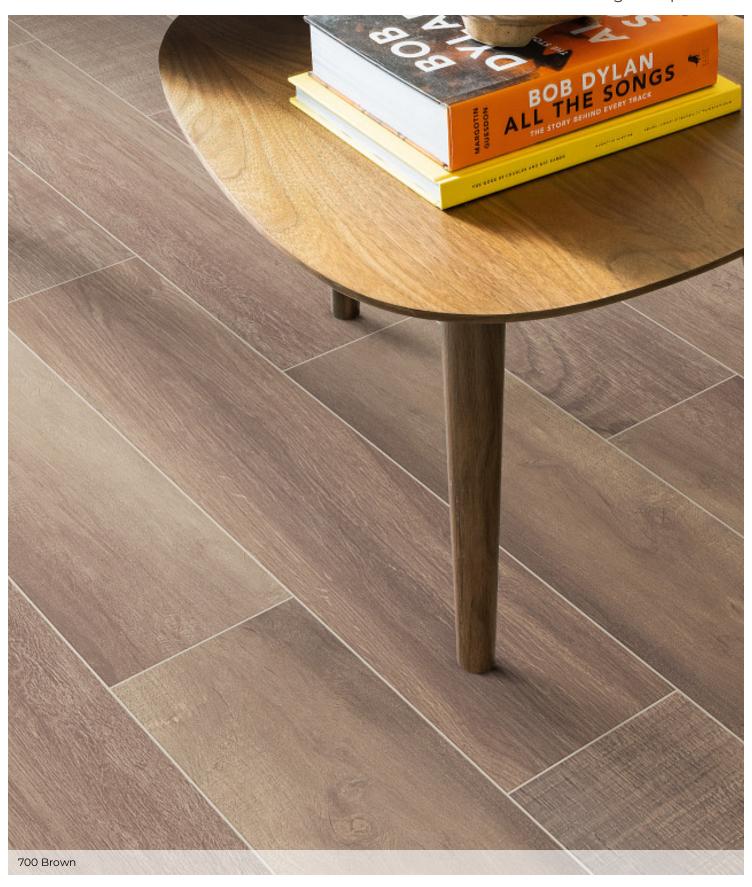

RECLAIMED 8X40

TILE & STONE

ConstructionPorcelainTile TypeFloorTile Size8" x 40" 20.32 cm x 101.6 cmEdgesPressedCountry Of OriginUSAResidential Warranty1 Year LimitedInstallation AreaFloors, WallsTechnicalYear Rating Group3 (Heavy Residential or Light Commercial)Breaking Strength>= 250 lbsWater Absorption %0.50% (Impervious (Porcelain))DCOF>= 0.42Shade & Texture VariationV3	Style Number	506TS
Tile Size 8" x 40" 20.32 cm x 101.6 cm Edges Pressed Country Of Origin USA Residential Warranty Installation Area Technical Wear Rating Group Breaking Strength Water Absorption % DCOF 8" x 40" 20.32 cm x 101.6 cm 8" x 40" 20.32 cm x 101.6 cm 8" x 40" 20.32 cm x 101.6 cm 1 Year 3 (Heavy Residential or Light Commercial) >= 250 lbs 0.50% (Impervious (Porcelain)) >= 0.42	Construction	Porcelain
EdgesPressedCountry Of OriginUSAResidential Warranty1 Year LimitedInstallation AreaFloors, WallsTechnical3 (Heavy Residential or Light Commercial)Breaking Group3 (Heavy Residential or Light Commercial)Breaking Strength>= 250 lbsWater Absorption %0.50% (Impervious (Porcelain))DCOF>= 0.42	Tile Type	Floor
Country Of Origin Residential Warranty Installation Area Technical Wear Rating Group Breaking Strength Water Absorption % DCOF USA 1 Year Limited Floors, Walls Floors, Walls Floors, Walls Floors, Walls O (Heavy Residential or Light Commercial) >= 250 lbs O (Impervious (Porcelain)) >= 0.42	Tile Size	8" x 40" 20.32 cm x 101.6 cm
Residential Warranty1 Year LimitedInstallation AreaFloors, WallsTechnical3 (Heavy Residential or Light Commercial)Breaking Group>= 250 lbsWater Absorption %0.50% (Impervious (Porcelain))DCOF>= 0.42	Edges	Pressed
Technical Wear Rating Group Breaking Strength Water Absorption % DCOF Floors, Walls Floors, Walls (Heavy Residential or Light Commercial) 5 = 250 lbs 0.50% (Impervious (Porcelain)) 5 = 0.42	Country Of Origin	USA
Technical Wear Rating Group Breaking Strength Water Absorption % DCOF 3 (Heavy Residential or Light Commercial) >= 250 lbs 0.50% (Impervious (Porcelain)) >= 0.42	Residential Warranty	1 Year Limited
Wear Rating Group3 (Heavy Residential or Light Commercial)Breaking Strength>= 250 lbsWater Absorption %0.50% (Impervious (Porcelain))DCOF>= 0.42	Installation Area	Floors, Walls
Wear Rating Group3 (Heavy Residential or Light Commercial)Breaking Strength>= 250 lbsWater Absorption %0.50% (Impervious (Porcelain))DCOF>= 0.42		
Breaking Strength>= 250 lbsWater Absorption %0.50% (Impervious (Porcelain))DCOF>= 0.42	Technical	
Water Absorption % 0.50% (Impervious (Porcelain)) DCOF >= 0.42	Wear Rating Group	3 (Heavy Residential or Light Commercial)
DCOF >= 0.42	Breaking Strength	>= 250 lbs
	Water Absorption %	0.50% (Impervious (Porcelain))
Shade & Texture Variation V3	DCOF	>= 0.42
	Shade & Texture Variation	V3

A DCOF value of > 0.42 is the new standard for tiles specified for commercial application in standard Al37.1-2012, Section 9.6. It replaces the SCOF value of > 0.60 referenced in ASTM Clo28. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com

MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard Al37.1 section 6.2.2.1.10.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A1371 standards

Colors







100 Betulla

500 Grey

700 Brown

