



140 Bleached Oak



200 Maple Select




210 Light Cherry



230 Antique Chestnu



240 Natural Oak




260 Mountain Oak




280 Cafe Noir




650 Cherry




710 Warm Chestnut




720 Callaway Pine




722 Brazilian Nut




760 Golden Hickory



740 Deer Lodge



760 Golden Hickory



780 Coffee Bean



790 Tundra


Style Name	BOSK	
Style Number	5401V	
Construction	High Performance Luxury Vinyl Plank	
Class / ASTM F1700	Class III Printed Film Vinyl Plank, Type A (smooth), Type B (embossed)	
Finish	ExoGuard [®]	
	U.S.	Metric
Nominal Dimensions	6 in w, 48 in l	15 cm w, 122 cm l
Actual Dimensions	6 in w, 48 in l	15.24 cm w, 121.92 cm l
Wear Layer Thickness	12 mil (0.012 in)	0.3 mm
Overall Thickness	0.098 in	2.5 mm
Installation	Direct Glue	
Recommended / Required Adhesive	Shaw 4100 or S150	



Packaging

Pieces per box	18 pcs	
Area per box	35.95 sq ft	3.34 sq m
Weight per box	30.42 lbs	13.8 kg

Recommended Installation Method

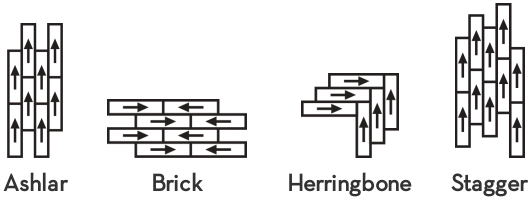

Performance Testing

Resistance to Chemicals (ASTM F925) **Passes**

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

7 Year Commercial Limited
Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient

Environmental

Indoor Air Quality **FloorScore[®] Certified**
Recycled Content **Pre-consumer - 0%, Post-consumer - 0%**

Specifications are subject to nominal manufacturing variance.
Material supply and/or manufacturing processes may necessitate changes without notice.

